
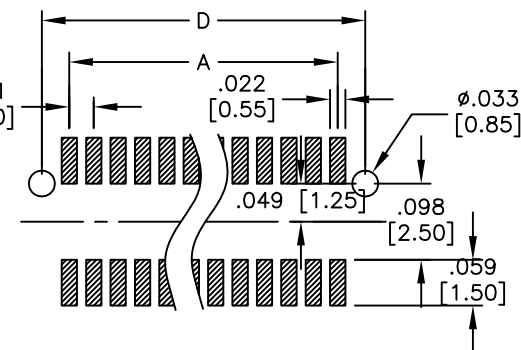
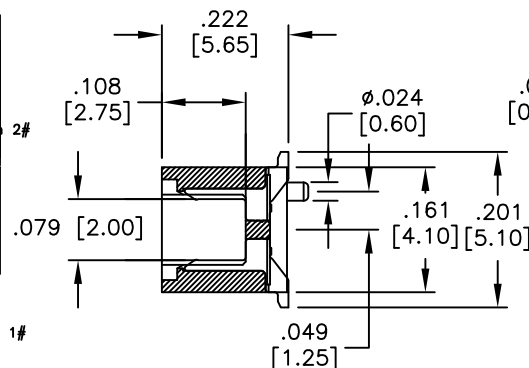



APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/20/10	

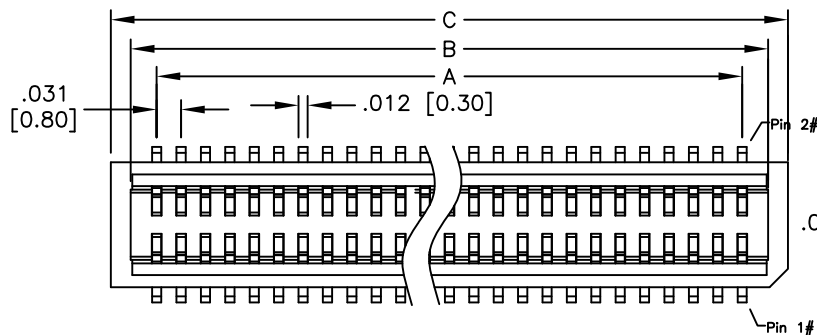

RECOMMENDED PCB LAYOUT

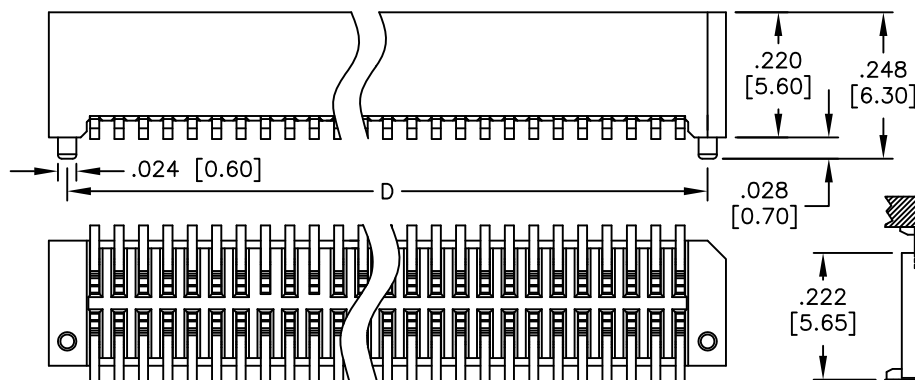

PACKAGED ON TAPE & REEL



ADAM P/N	Plug Height (A1)	Mating Height (H)
BB8-SN-XX-G-5.65-T/R	.144 [3.55]	.256 [6.50]
BB8-SN-XX-G-5.65-T/R	.159 [4.05]	.276 [7.00]

Mated with: BB8-PN-XXX-G-X.XX-T/R

Positions: 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 50, 60, 68, 70, 80, 90, 100

A = .031 [0.80] x (No. of Positions per row - 1)
B = .031 [0.80] x (No. of Positions per row - 1) + .067 [1.70]
C = .031 [0.80] x (No. of Positions per row - 1) + .118 [3.00]
D = .031 [0.80] x (No. of Positions per row - 1) + .071 [1.80]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: White

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 100 VAC max.

Current rating: 0.5 Amps max.

Contact resistance: 40 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	DY	7/20/10
CHECKED		
APPROVED		



TITLE
.031 [0.80] BOARD TO BOARD SOCKET
5.65MM HEIGHT, SMT TYPE

SIZE	PART NO.	REV.
X	BB8-SN-XX-G-5.65-T/R	-
REF: S00056T	SCALE: NTS	SHEET 1 OF 1