
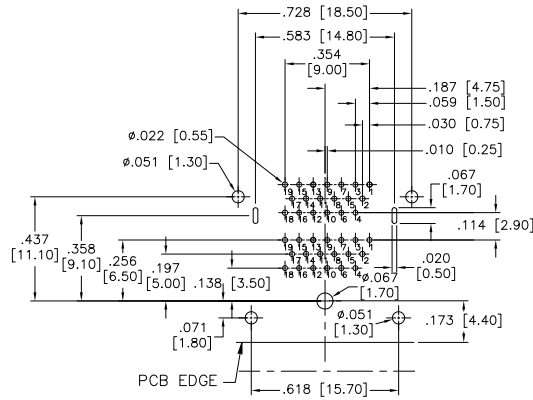

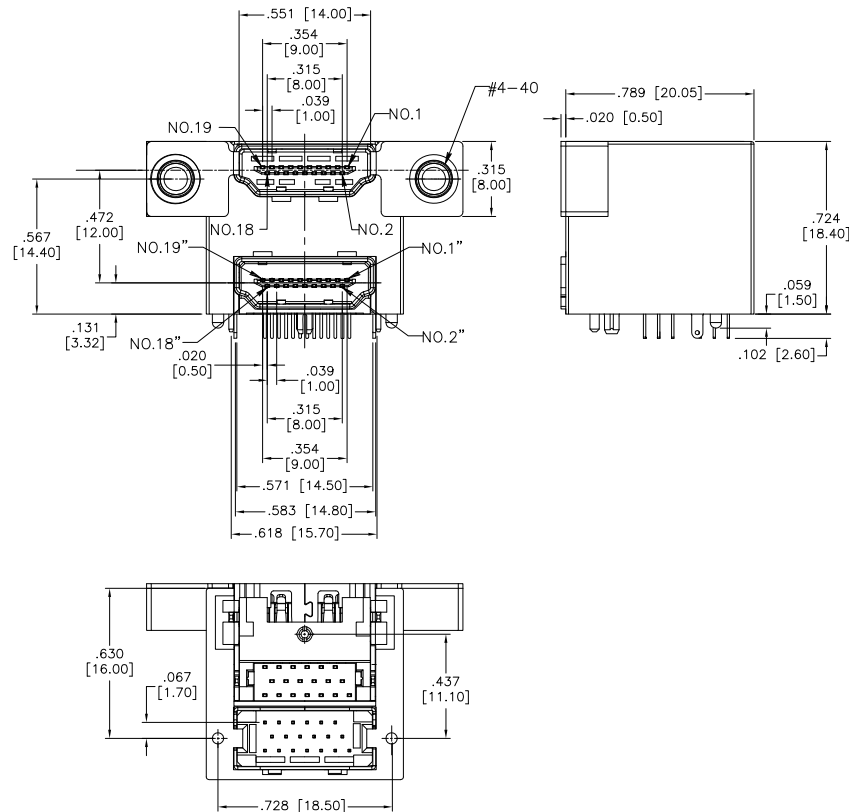


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/10	

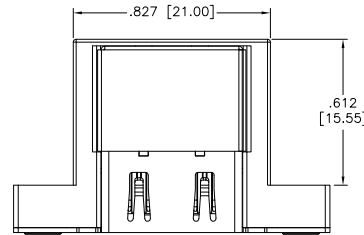

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Copper Alloy
Shield: Copper Alloy, Tin plated over Nickel
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on tails.
Electrical:
Current rating: 0.5A
Dielectric strength: 500VAC for 1 minute min.
Insulation resistance: 100 Megohm min @ 500V DC
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS Compliant
Recommended soldering temp: 260°C for 5 seconds.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ±.10 .XX ± .020 Ø.XX ±.015 .XXX ± .015 Ø.XXX ±.010			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
APPROVALS		DATE		TITLE DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE	
DRAWN	DY	11/16/10			
CHECKED					
APPROVED					
SIZE		PART NO.		REV.	
X		HDMI-D-RA-1-MF		-	
REF:		S000176T		SCALE: NTS	
				SHEET 1 OF 1	