

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description







Date

Appr

-

RELEASED

1/22/19

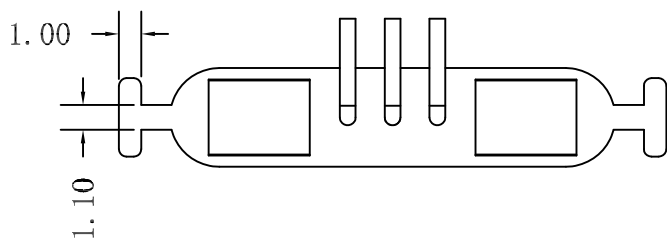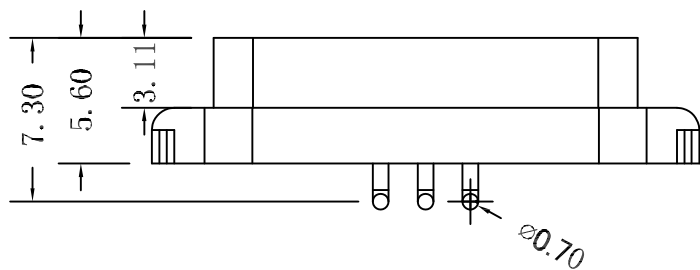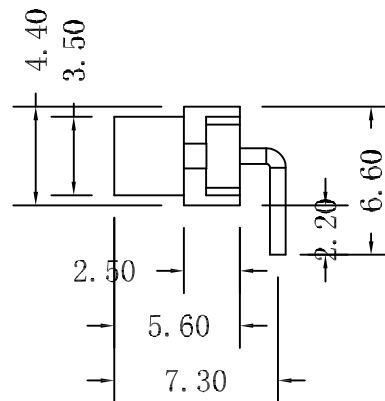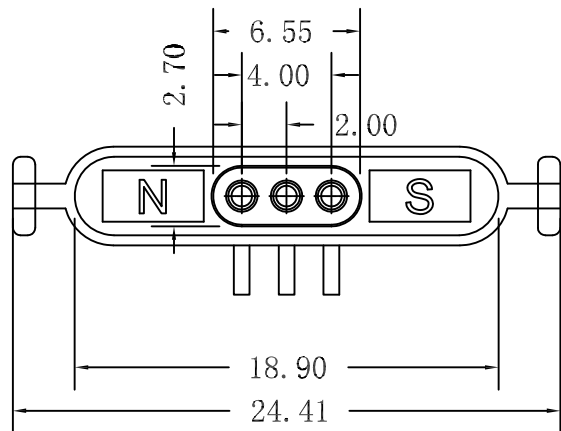

PCB LAYOUT
Layout Tolerance: $\pm 0.05\text{mm}$

Mating with: CA-USBAM-PH-3E03A-MVCC

SPECIFICATIONS:

Material:

Housing: PA, Color: White

Contact: Brass, 10u" Gold over 50~80u" Nickel plated

Electrical:

Rating Voltage (per contact): 5 Volts

Rating Current (per contact): 2 A max

Temperature Rating:

Operating temperature: -30°C to $+85^{\circ}\text{C}$

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X. ± 0.20	X" $\pm 2^{\circ}$
.X ± 0.15	.X" $\pm 0.5^{\circ}$
.XX ± 0.10	

APPROVALS

DATE

DRAWN

HR

1/22/19

CHECKED

RC1

1/22/19

APPROVED



TITLE
2.54MM PITCH POGO PIN, FEMALE, 3P
SINGLE ROW, MAGNET, R/A

SIZE

X

PART NO.

PH1-3E-03-FHMP-56765

REV.

-

REF: S00185C

SCALE: NTS

SHEET 1 OF 1