

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

8/25/16

D

D

C


C

B

B

A

A

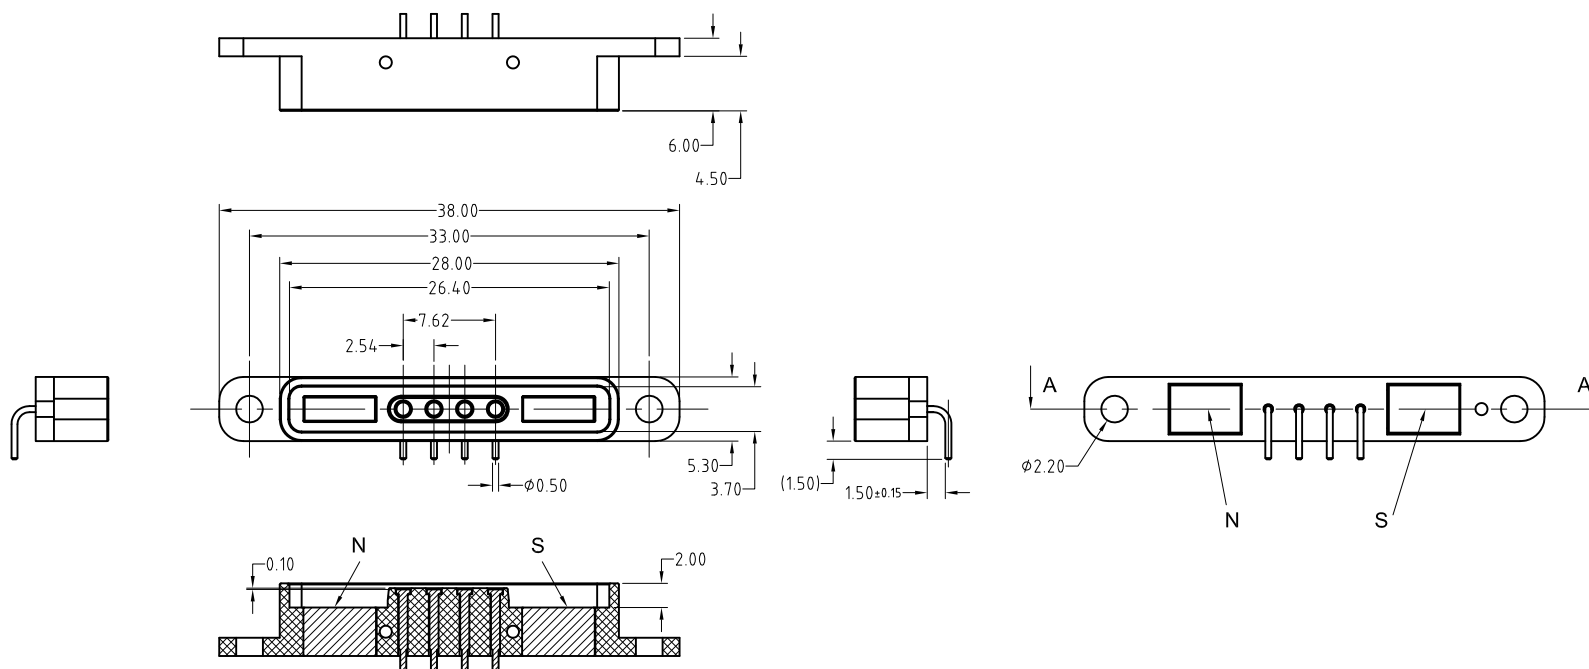

SPECIFICATIONS:

Material:

Insulator: HTN, rated UL 94V-0

Insulator color: Black

Contact: Pogo pin, 5u" Gold plated

Magnet: N52 NdFeB, Ni-Cu-Ni plated

Electrical:

Rating Current & Voltage rating: 12VDC, 3A

Contact resistance: 50 mohms max

Environmental:

Lead free, RoHS compliant.



Mating with: CA-USBAM-PH-3E04-MVCC

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES

.X	± .25	Ø.XX	± .15
.XX	± .15		
.XXX	± .05		

APPROVALS

DATE

DRAWN

HR

8/25/16

CHECKED

CK

8/25/16

APPROVED



TITLE
2.54MM PITCH POGO PIN, FEMALE, 4P
SINGLE ROW, MAGNET, R/A

SIZE

X

PART NO.

PH1-3E-04-FHMP-6075

REV.

-

REF: S00170C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1