

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

6/29/17

D

D

C







C

B

B

A

A

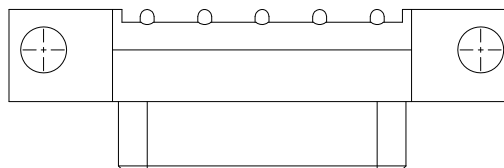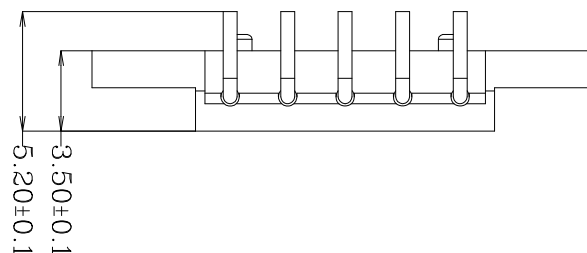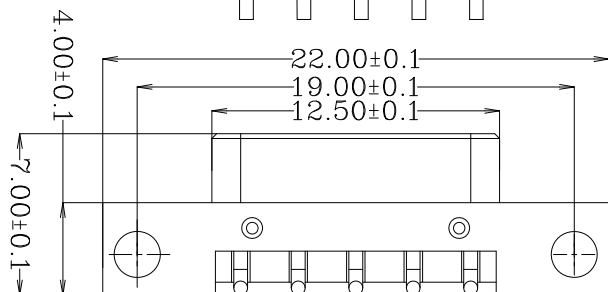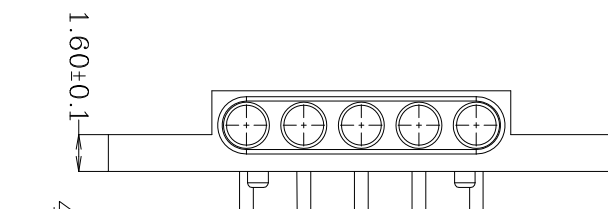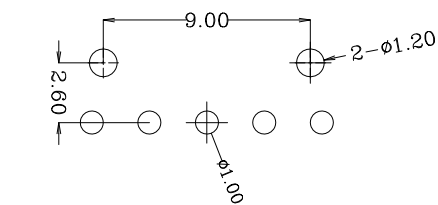

SPECIFICATIONS:

Material:

Pover Pin: Brass, 3u" Gold plated over Nickel

Housing: LCP 265* Max

Electrical:

Rated Voltage (per Contact): 12 Volts

Rated Current (per Contact): 3.0A max

Dielectric withstanding voltage: 100 VRMS @ 60HZ

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES

MM
.X ± .25
.XX ± .15
.XXX ± .05

Ø.XX ±.15

APPROVALS

DATE

DRAWN

AY

6/29/17

CHECKED

CK

6/29/17

APPROVED



TITLE
POGO PIN HEADER, 2.5MM PITCH
FEMALE, 5 PIN, RIGHT ANGLE

SIZE

PART NO.

REV.

X

PH1-C2535-05-FHP-52

-

REF: S00185C

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1