
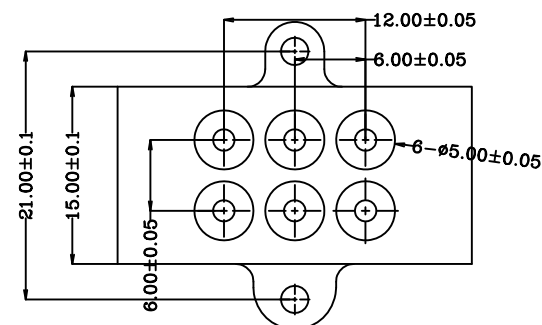

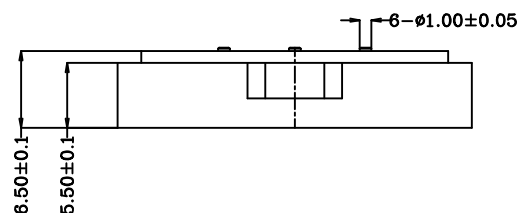


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date   | Appr |
|-----|-------|-------------|--------|------|
| -   |       | RELEASED    | 7/3/17 |      |

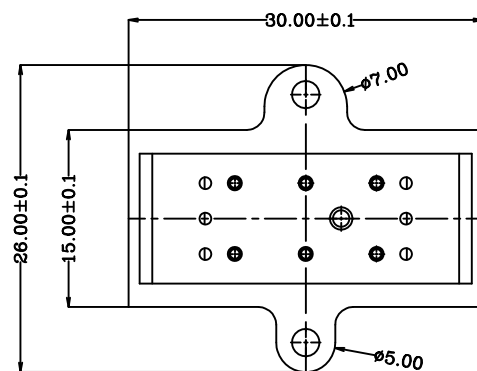

# SPECIFICATIONS:

Material:

Insulator: PA46

Contact: Brass, 3u" Gold over Nickel

Electrical:

Voltage rating (Per Contact): 12 Volts

Current rating (Per Contact): 2 A max

Contact resistance: 30 mohms max @ working stroke

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 100 VRMS

Mechanical:

Durability: 30,000 cycles min

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MILLIMETERS  
 TOLERANCES: EXCEPT AS NOTED  
 Millimeters HOLES  
 .X ± .25  
 .XX ± .15  
 .XXX ± .05

| APPROVALS |    | DATE   |
|-----------|----|--------|
| DRAWN     | HR | 7/3/17 |
| CHECKED   | CK | 7/3/17 |
| APPROVED  |    |        |



TITLE  
 6.00MM PITCH POGO PIN HEADER,  
 FEMALE, 2X3P, DUAL ROW, STRAIGHT

| SIZE         | PART NO.            | REV.         |
|--------------|---------------------|--------------|
| X            | PH2-C665-06-FVP-65S | -            |
| REF: S00185C | SCALE: NTS          | SHEET 1 OF 1 |