

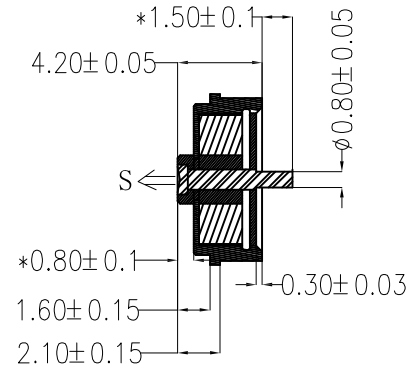

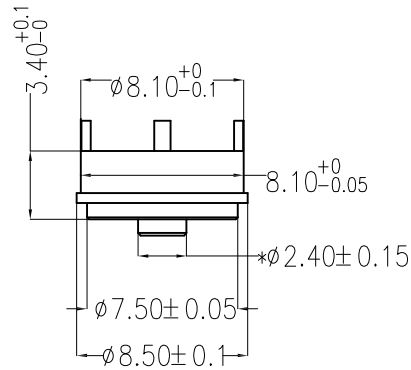


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/16/18	
A		UPDATED DRAWING	5/10/18	HR/DH
B		UPDATED DRAWING	8/13/19	AY/RC
C		UPDATED DRAWING	4/13/23	LH/KL

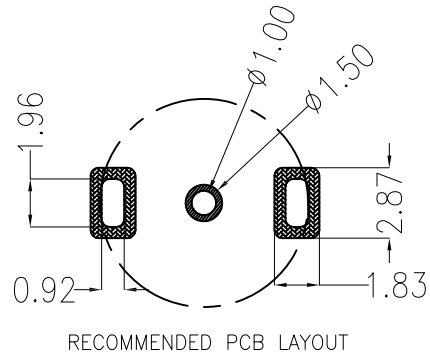

SPECIFICATIONS:

Material:

Housing: (PA46) Hi-Temp Thermoplastic, Color: Black

Magnet: N52

Power pin: Brass, Gold flash plated over Nickel

Body leaded: Brass, Nickel plated

Electrical:

Voltage rating (Per Contact): 5 Volts

Current rating (Per Contact): 1 A max

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Lead free, RoHS compliant.



Mating with: CA-RA2-PHR-265778-M

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X. ± 0.20 X*. ± 2°
.X ± 0.15 .X* ± 0.5°
.XX ± 0.10

APPROVALS		DATE
DRAWN	HR	3/16/18
CHECKED	CK	3/16/18
APPROVED		



TITLE

POGO PIN CHARGING DOCKING, FEMALE, BLACK

SIZE	PART NO.	REV.
X	PHR-C3449-02-FVP-570	C

REF: S00185C SCALE: NTS SHEET 1 OF 1