



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/1/11	

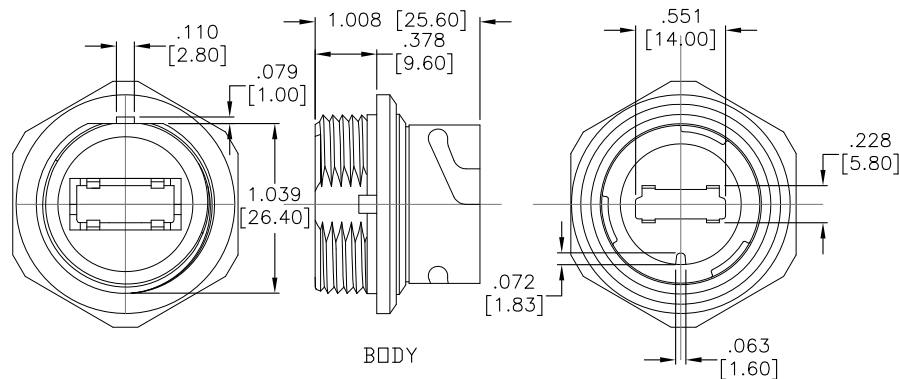


BODY

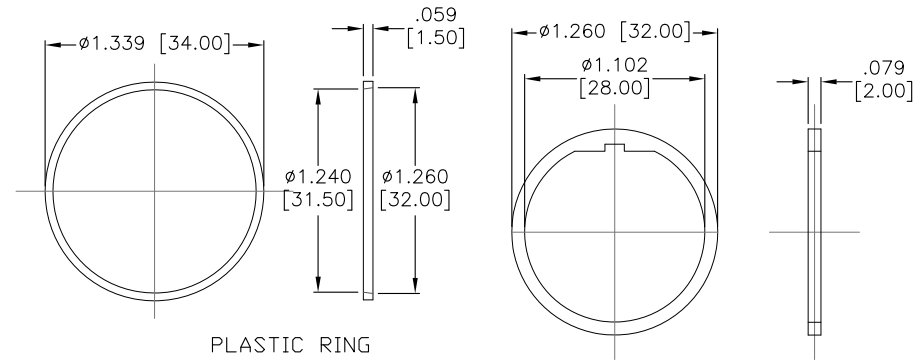


PLASTIC RING


O-RING

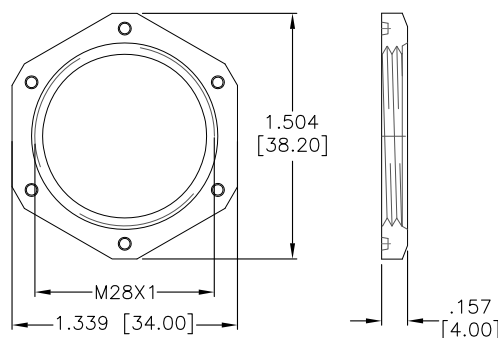


NUT

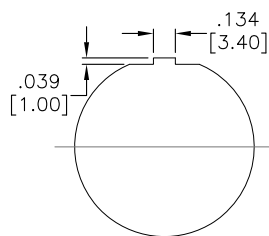



PANEL CUT-OUT

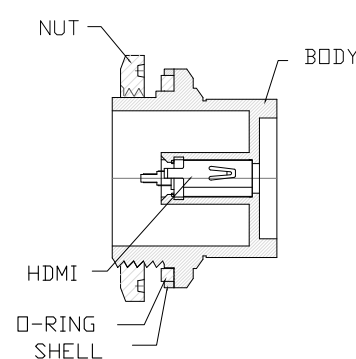

Assembly
SECTION A-A

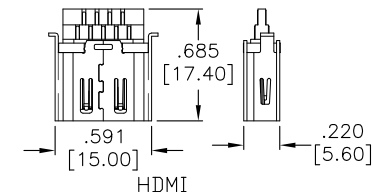

HDMI

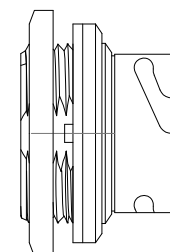

Assembly

SPECIFICATIONS:

Material:

Body: PBT, rated UL 94V-0, color: Black
 Plastic Ring: PBT, rated UL 94V-0, color: Black
 Nut: PBT, rated UL 94V-0, color: Black
 O-Ring: Silicone, color: Black

HDMI:

Housing: LCP, rated UL 94V-0
 Housing color: Black
 Cup: LCP, rated UL 94V-0, color: Black
 Contact: Copper alloy
 Shield: Brass, Gold plated

Plating:

15u" Gold over Nickel underplate on contact area,
 Tin over Nickel underplate on solder tails.

Electrical:

Voltage rating: 40V
 Current rating: 0.5A
 Temperature Rating:
 Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS Compliant
 Recommended soldering temp: 260°C for 5 seconds.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
INCHES			HOLES		
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XX	± .015		
.XXX	± .015	Ø.XXX	± .010		
APPROVALS			DATE		
DRAWN	AY	9/1/11			
CHECKED	NP	9/1/11			
APPROVED					
			TITLE HDMI RECEPTACLE, VERTICAL, FEMALE WATERPROOF		
SIZE X		PART NO. HDMI-F-S-WPH		REV. -	
REF: S00137T		SCALE: NTS		SHEET 1 OF 1	