


6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/1/11	

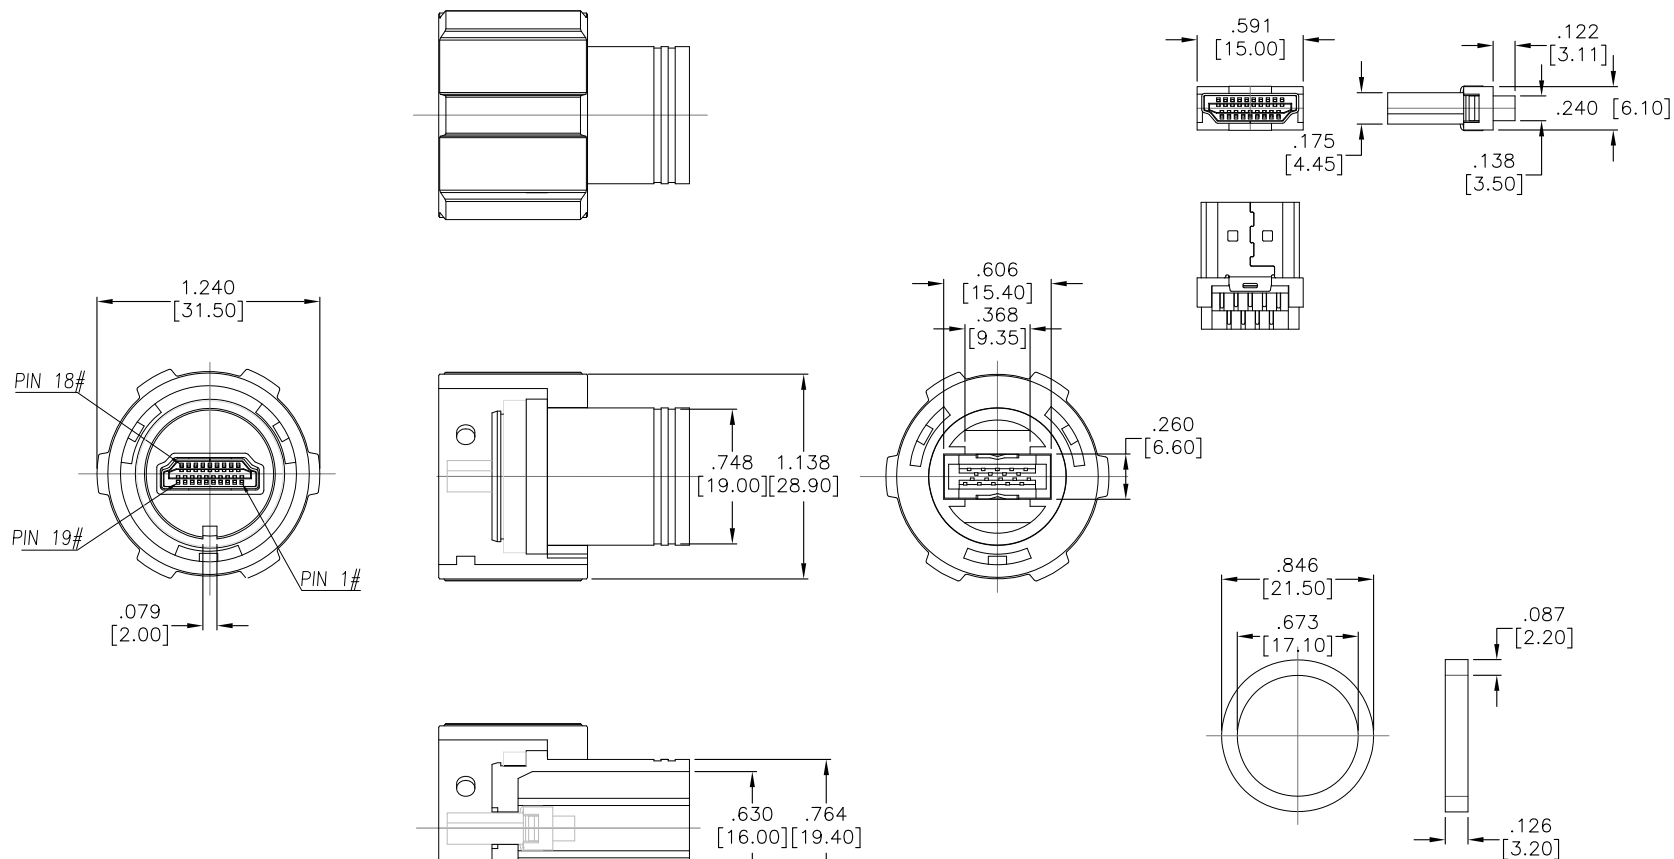

SPECIFICATIONS:

Material:

EXTERNAL:

Housing: PBT, rated UL 94V-0

Housing color: Black

Nut: PBT, rated UL 94V-0, color: Black

O-Ring: Silicone, color: Black

HDMI:

Front Housing: LCP, rated UL 94V-0

Back Housing: PBT+GF30%, rated UL 94V-0

Housing color: Black

Contact: Phosphor Bronze

Shield: Brass, Gold plated.

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeal.com	
APPROVALS		DATE	
DRAWN	AY	9/1/11	
CHECKED	NP	9/1/11	
APPROVED			
TITLE		HDMI RECEPTACLE, VERTICAL, MALE WATERPROOF	
SIZE	X	PART NO.	HDMI-M-S-WPH
REF:	S00137T	SCALE:	NTS
SHEET 1 OF 1			