

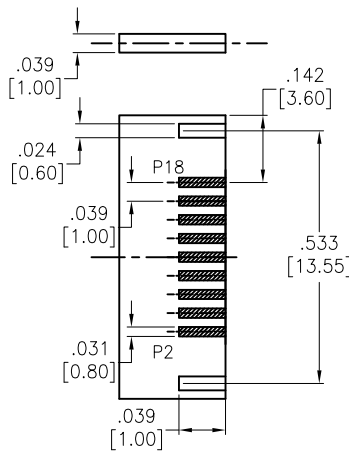
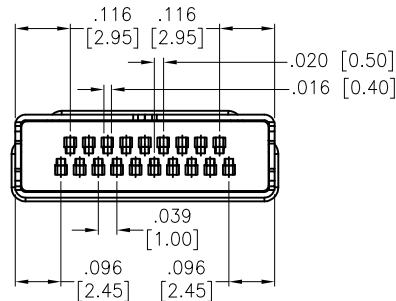
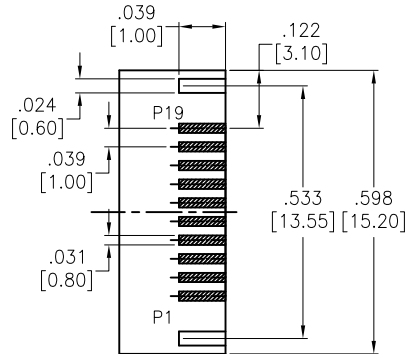
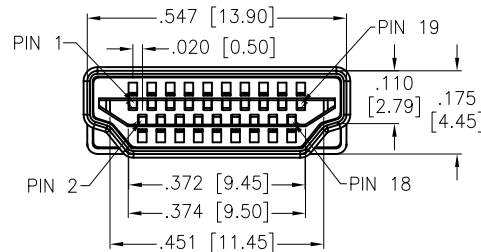




APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/23/15	
A		UPDATE DIM.	4/28/15	AY/SY
B		UPDATE SHELL SPEC.	3/30/17	AY/SY

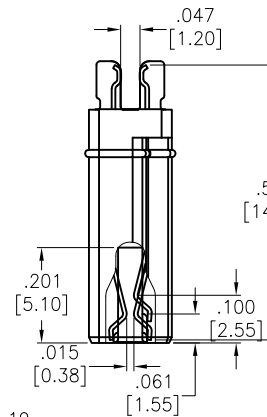

RECOMMENDED PCB LAYOUT



SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL94V-0

Insulator color: Black

Contact: Brass

Shell: Brass, Gold plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 40 VAC (r.m.s) max.

Current rating: 0.5 Amp max

Contact resistance: 10 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	HR	4/23/15	
CHECKED	SY	4/23/15	
APPROVED			



Metabee (Chengdu) Technology Co., Ltd.
 Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE HDMI MALE CONNECTOR , A TYPE MALE, STRADDLE MOUNT FOR .039 [1.00] PCB THICKNESS			
SIZE X	PART NO. HDMI-PLUG-OM7	REV. B	
REF: S00257T	SCALE: NTS	SHEET 1 OF 1	