
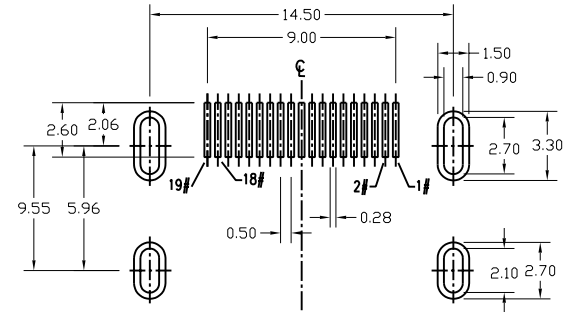





APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	03/18/05	

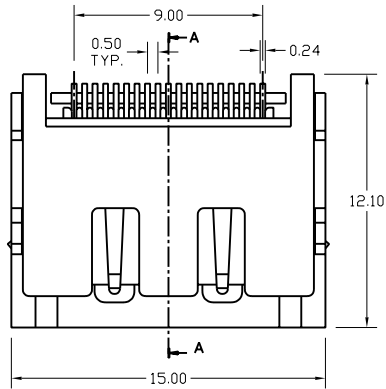

P.C.B LAYOUT

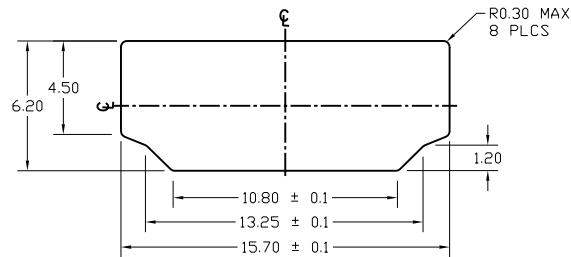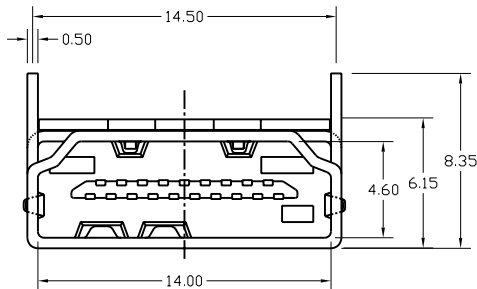

REFERENCE PANEL CUT OUT DIMENSION

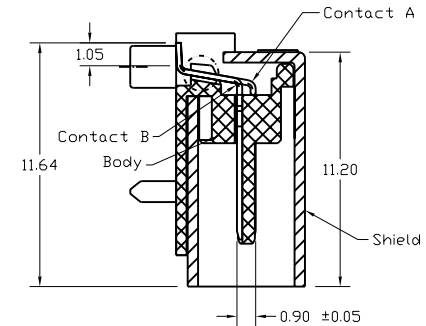

SECT:A-A

SPECIFICATIONS:

Material:

Insulator: LCP, glass reinforced, rated UL 94V-0

Insulator color: Black

Shield: Brass, Tin plate over Nickel underplate

Contacts: Brass

Plating:

Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails

Electrical:

Operating voltage: 40 VDC max.

Current rating: 0.5 Amps max.

Contact resistance: 30 mohms max.

Insulation resistance: 2000 Mohms min.

Dielectric withstanding voltage: 1200 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260° for 5 sec.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	03/18/05
CHECKED		
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
HDMI CONNECTOR, 19 POS, RIGHT ANGLE SURFACE MOUNT, NO FLANGE			
SIZE	PART NO.	REV.	
X	HDMI-S-R-NF-SMT	.	
REF:		SCALE: NTS	SHEET 1 OF 1