

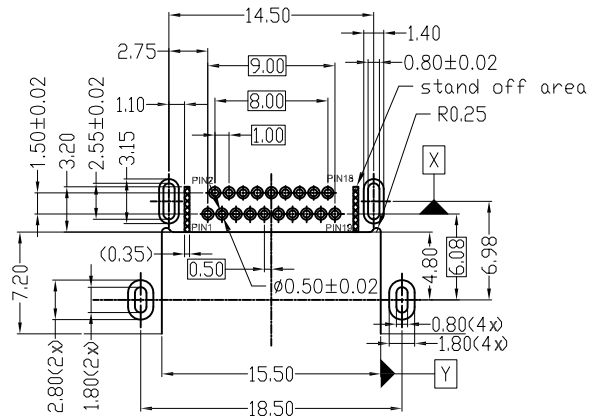
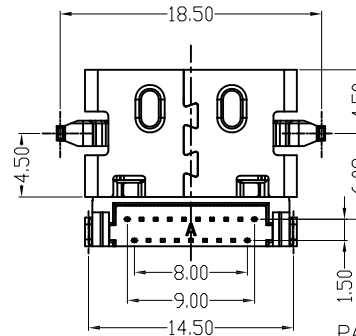




APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/19/18	
A		UPDATE DRAWING	7/17/20	AY/RC

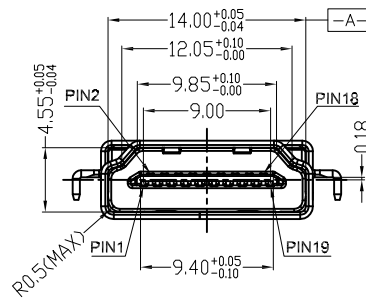

RECOMMENDED PCB LAYOUT

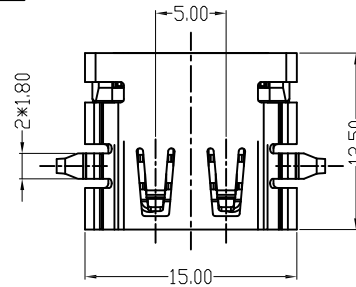

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shell: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Contact resistance: 10 mohms max.

Insulation resistance: a, unmated: 100 Megohm min @ 500 VDC.

b, mated: 10 Megohm min @ 150 VDC.

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X. ± 0.30	X" ± 2°
.X ± 0.25	.X" ± 1.5°
.XX ± 0.20	

APPROVALS		DATE
DRAWN	AY	6/19/18
CHECKED	MY	6/19/18
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
HDMI CONNECTOR, RIGHT ANGLE DIP ASSEMBLY, TAPE & REEL			
SIZE	PART NO.	REV.	
X	HDMI-S-RA-1-RF-05-T/R	A	
REF: S00015C		SCALE: NTS	SHEET 1 OF 1