


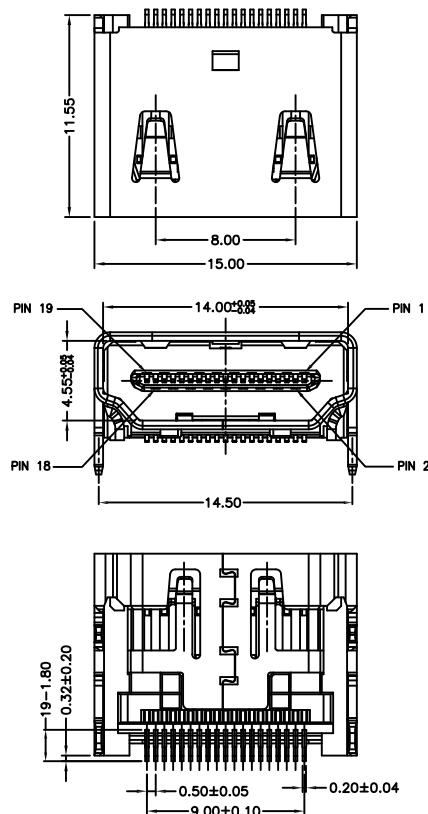


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/8/18	

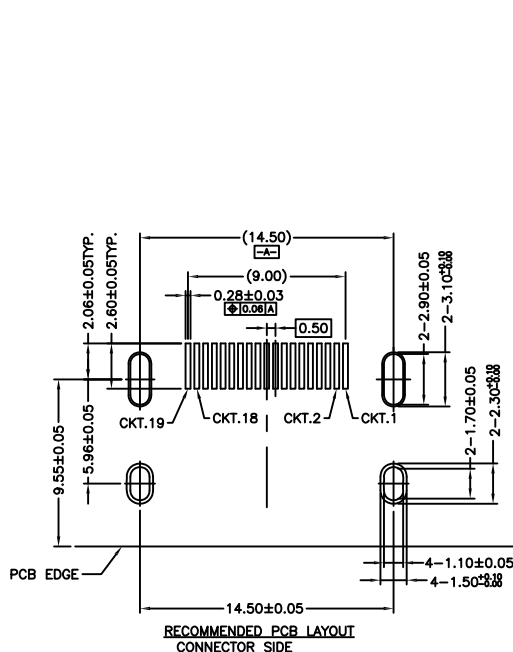

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shield: SPCC, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Matte Tin over Nickel underplate on solder tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Contact resistance: 10 mohms max

Insulation resistance: UNMATED: 100 Mohms min @ 500 VDC

MATED: 10 Mohms min @ 150 VDC

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED		METABEE Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
MM .X ± 0.25 .XX ± 0.20 .XXX ± 0.15		HOLES X" ± 2" .X" ± 1.5"	
APPROVALS		DATE	
DRAWN	AY	5/8/18	
CHECKED	RT	5/8/18	
APPROVED			
TITLE		HDMI CONNECTOR, RIGHT ANGLE, SMT	
SIZE	X	PART NO.	HDMI-S-RA-SMT-03A-T/R
REF:	S00005C	SCALE:	NTS
SHEET 1 OF 1		REV. -	