



APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/01/10	

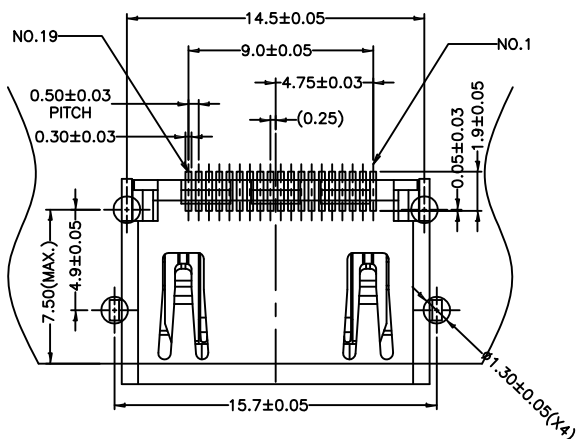

RECOMMENDED PCB LAYOUT (THICKNESS=1.6±0.15mm)

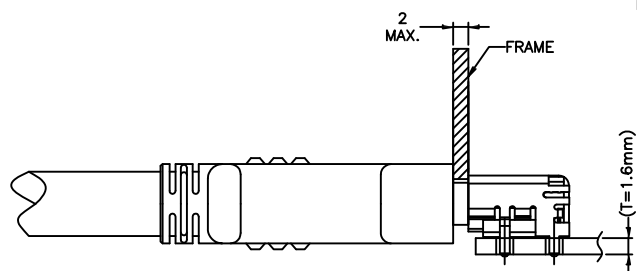

REFERENCE MOUNT DIMENSION

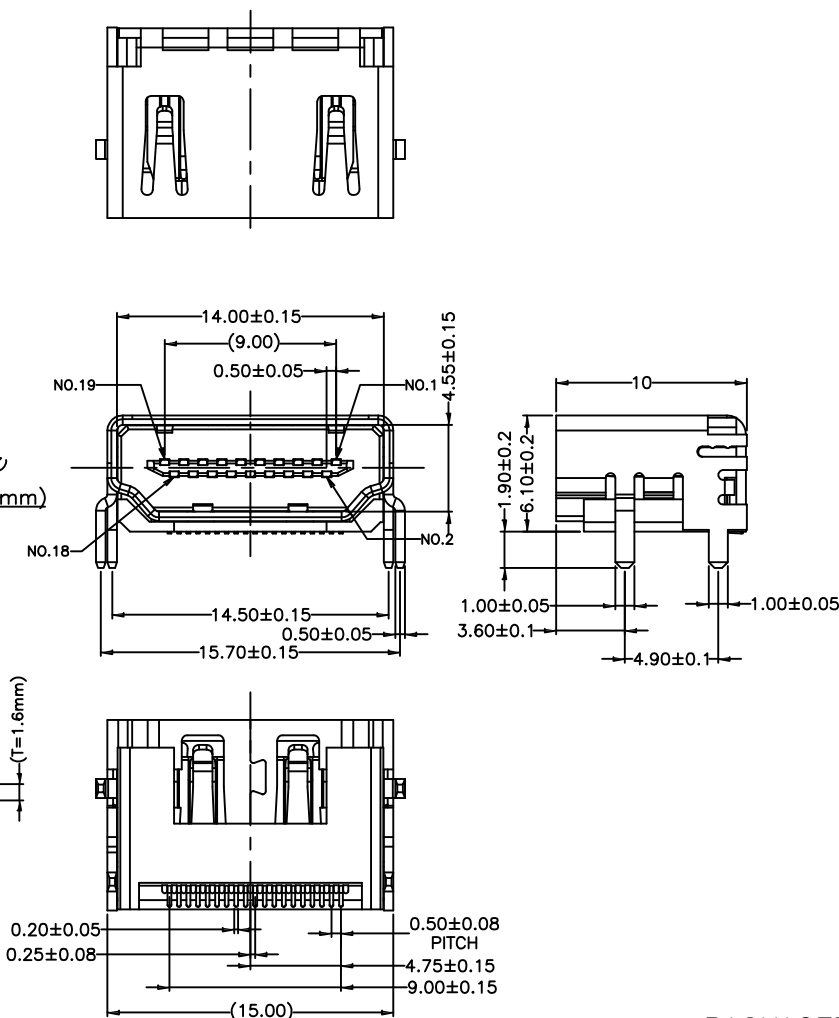

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shield: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 300VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 10 mohms max.

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	DY	7/01/10
CHECKED		
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
HDMI CONNECTOR, RIGHT ANGLE, SMT			
SIZE	PART NO.	REV.	
X	HDMI-S-RA-SMT-04-T/R	-	
REF:	S00106T	SCALE:	NTS
SHEET 1 OF 1			