
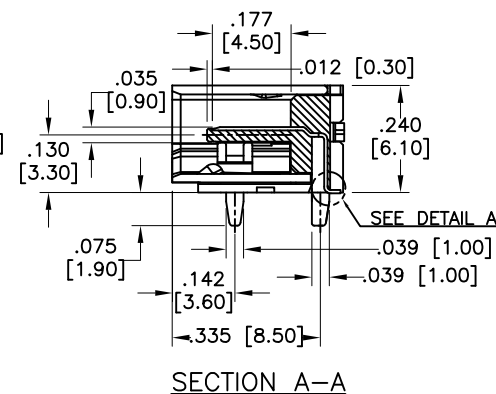
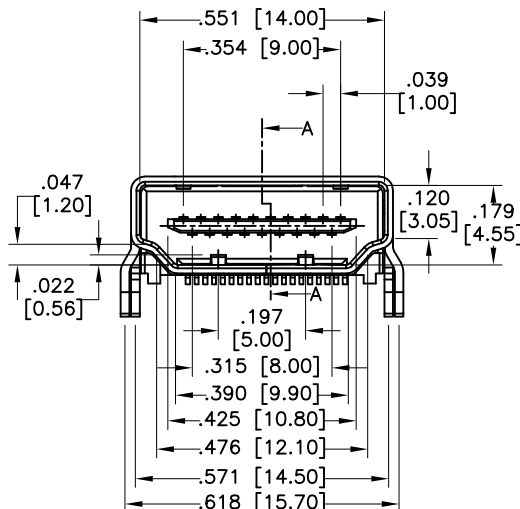

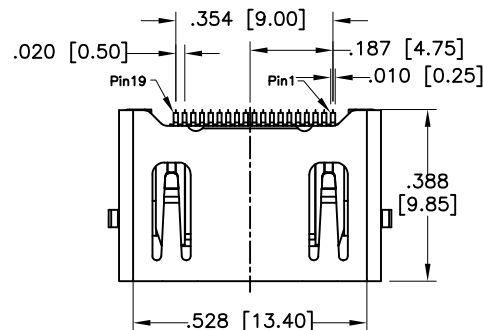


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	09/15/15	

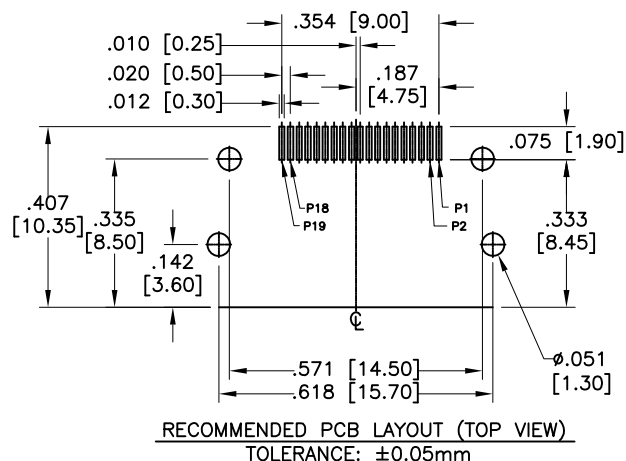

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Brass

Shield: Brass, Nickel plated

Plating:

30u" Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails.

Electrical:

Current rating: 0.5A

Contact resistance: 30 mohms max.

Insulation resistance: 100 Megohm min.

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C o +85°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
.X ± .10	Ø.X ±.10				
.XX ± .020	Ø.XX ±.015		TITLE HDMI CONNECTOR, RIGHT ANGLE SINGLE, SMT TYPE, 30u" GOLD		
.XXX ± .015	Ø.XXX ±.010				
APPROVALS		DATE	SIZE X PART NO. HDMI-S-RA-SMT-07-30-T/R		
DRAWN	TW	09/15/15			
CHECKED					
APPROVED					
			REF: S00097C	SCALE: NTS	SHEET 1 OF 1