





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/7/21	
A		UPDATED DRAWING	5/16/22	JJ/NL

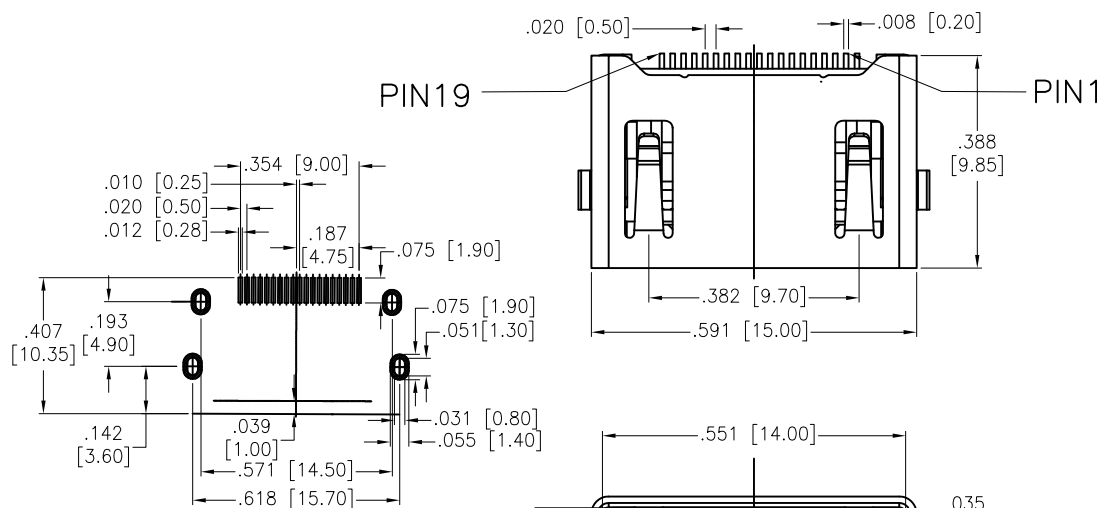

RECOMMENDED PCB LAYOUT

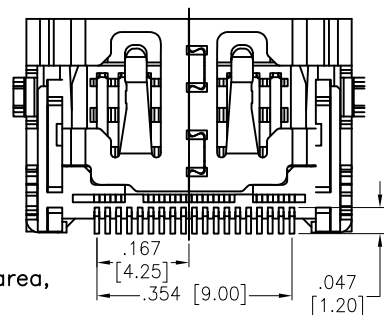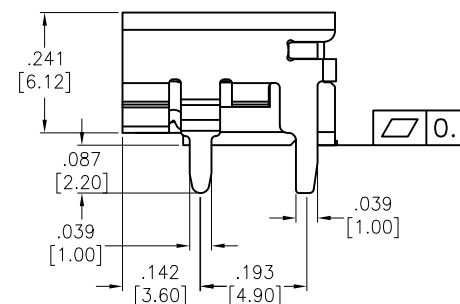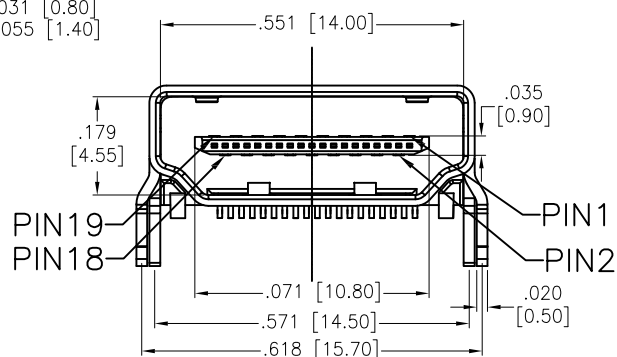

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Brass

Shield: Brass, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Current rating: 0.5A

Voltage rating: 40 V

Contact resistance: 30 mohms max.

Insulation resistance: 100 Megohm min @ 500V DC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C o +85°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010

DRAWN	AY	8/19/13
CHECKED	YC	8/19/13
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECHMetabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE		HDMI CONNECTOR, RIGHT ANGLE SINGLE, SMT TYPE		
SIZE	PART NO.	HDMI-S-RA-SMT-07-T/R		REV. A
REF:	S00097C	SCALE:	NTS	SHEET 1 OF 1