

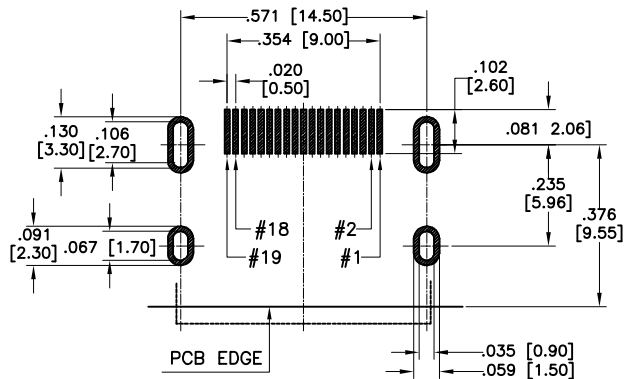




APPROVED: _____
DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/11	
A		REDRAWN	12/2/13	AY/NP
A		ADDED DIM.	9/1/16	AY/AT

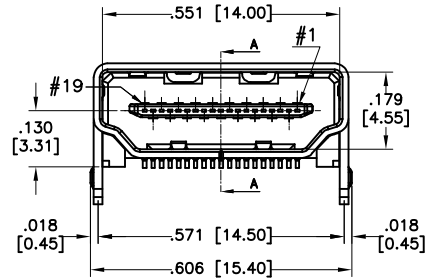

RECOMMENDED PCB LAYOUT

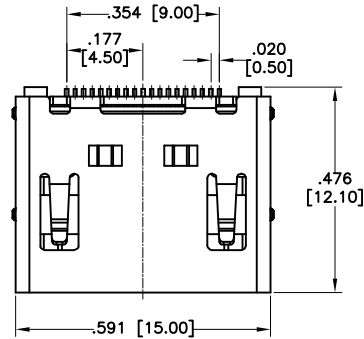

SECTION A-A

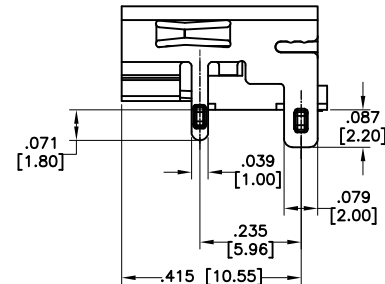

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Shield: Copper Alloy, Nickel Plated

Contacts: Copper Alloy

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on tails

Electrical:

Current rating: 0.5 A per pin.

Voltage rating: 40 VAC

Contact resistance: 60 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com				
INCHES		HOLES				TITLE HDMI CONNECTOR, 19 POS, RIGHT ANGLE SURFACE MOUNT, 15u" SEL GOLD PLATED	
.X ± .10	ØX ± .10						
.XX ± .020	ØXX ± .015						
.XXX ± .015	ØXXX ± .010						
APPROVALS		DATE					
DRAWN	AY	11/25/11					
CHECKED	CC	11/25/11					
APPROVED							
		SIZE X	PART NO. HDMI-S-RA-SMT-15-T/R		REV. B		
		REF: S00009T	SCALE: NTS	SHEET 1 OF 1			