






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/4/15	
A		UPDATE SPEC.	4/18/17	AY/MY
B		UPDATE DRAWING	10/31/19	OW/DL

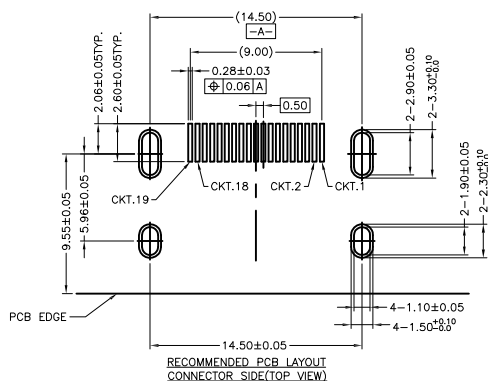

SPECIFICATIONS:

Material:

Housing: (LCP) Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shell: Copper Alloy, Nickel plated

Plating:

30u" Gold over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Contact resistance: 10 mohms max

Insulation resistance: UNMATED: 100 Mohms min @ 500 VDC

MATED: 10 Mohms min @ 150 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED			METABEE Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
MM	ANGLE		TITLE HDMI CONNECTOR, RIGHT ANGLE, SMT TYPE HEADER ASSEMBLY, NO MYLAR	
X. ± 0.35	X" ± 2°		SIZE X	PART NO. HDMI-S-RA-SMT-A-30-NKT-T/R
.X ± 0.25	.X" ± 1.5°		REF: S00005C	SCALE: NTS
.XX ± 0.15			SHEET 1 OF 1	
APPROVALS		DATE	REV. B	
DRAWN	AY	5/4/15		
CHECKED	SL	5/4/15		
APPROVED				