
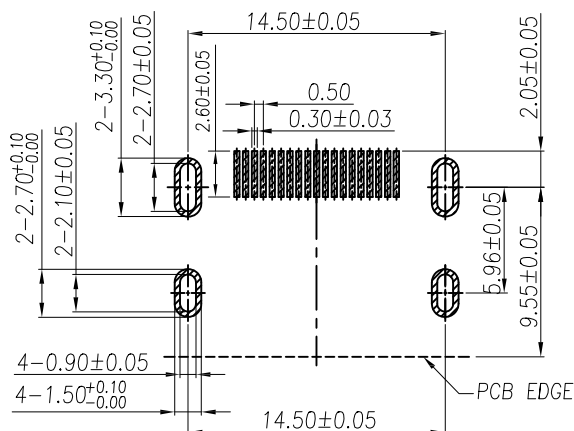





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/4/10	
A		REVISED DIM.	7/4/11	
B		REDRAWN	12/22/12	
C		UPDATED DRAWING	7/19/18	HR/MY
D		UPDATED DRAWING	6/24/19	AY/IW



RECOMMENDED PCB LAYOUT (T:1.60mm)
TOLERANCE UNSPECIFIED $\pm 0.10\text{mm}$

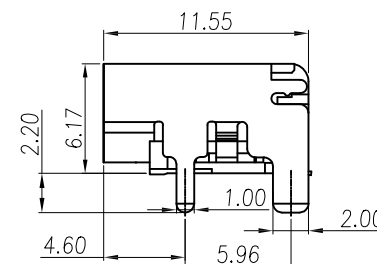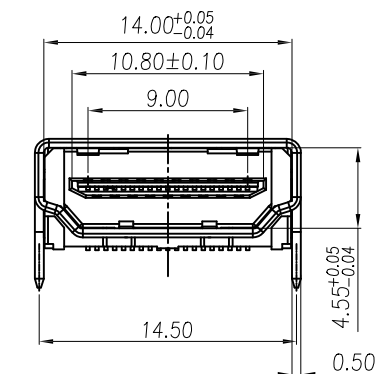

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Brass

Shell: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate on Contact area,

Matte Tin over Nickel underplate on Solder tails.

Electrical:

Voltage rating: 40 V

Current rating: 0.5 A

Contact resistance: 30 mohms max.

Insulation resistance: 100 Megohm min.

Temperature Rating:

Operating temperature: -20°C to $+85^{\circ}\text{C}$

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	HOLES
X.X ± 0.25	X" $\pm 1.5^{\circ}$
X.XX ± 0.15	.X" $\pm 1.0^{\circ}$
X.XXX ± 0.10	.XX" $\pm 0.5^{\circ}$

APPROVALS		DATE
DRAWN	AY	11/4/10
CHECKED	AH	11/4/10
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE
HDMI CONNECTOR, RIGHT ANGLE
SMT TYPE, HEADER ASSEMBLY

SIZE	PART NO.	REV.
X	HDMI-S-RA-SMT-A-T/R	C
REF:	S00161C	SCALE: NTS
SHEET 1 OF 1		