
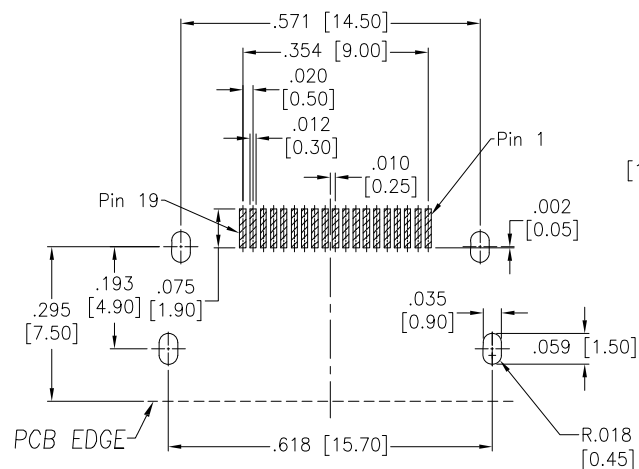





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/8/14	
A		REVISED DIM.	5/14/15	AY/KW



RECOMMENDED PCB LAYOUT
TOLERANCE UNSPECIFIED $\pm .004$ " [± 0.10 mm]

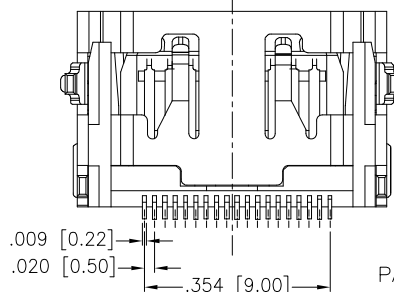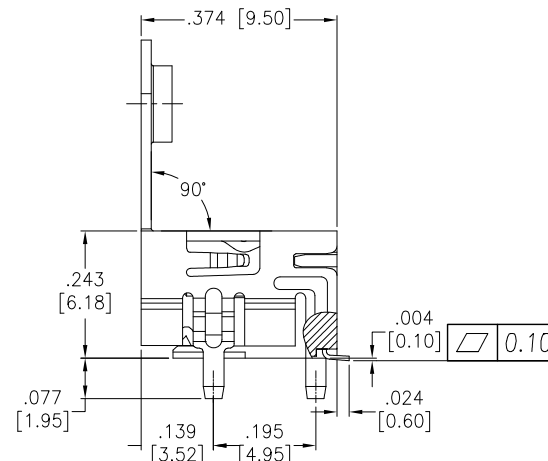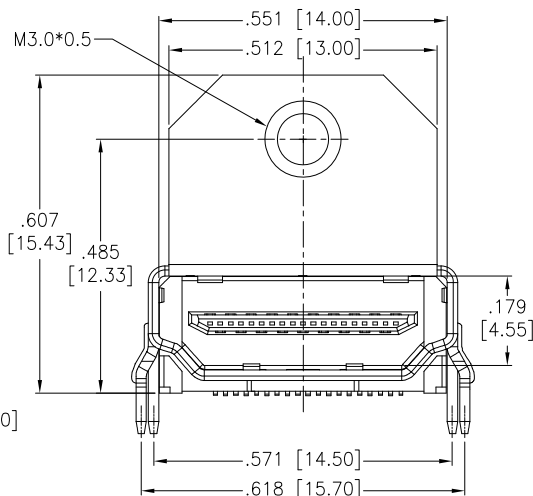

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shield: Copper Alloy

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Contact resistance: 30 mohms max.

Insulation resistance: 100 Megohm min.

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS DATE

DRAWN	SS	10/8/14
-------	----	---------

CHECKED		
---------	--	--

APPROVED		
----------	--	--



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE
HDMI CONNECTOR WITH MOUNTING FLANGE
RIGHT ANGLE, SMT TYPE, 15u" SEL-GOLD

SIZE X	PART NO. HDMI-S-RA1-SMT-02-MF-15-T/R	REV. A
-----------	---	-----------

REF: S00075C	SCALE: NTS	SHEET 1 OF 1
--------------	------------	--------------