

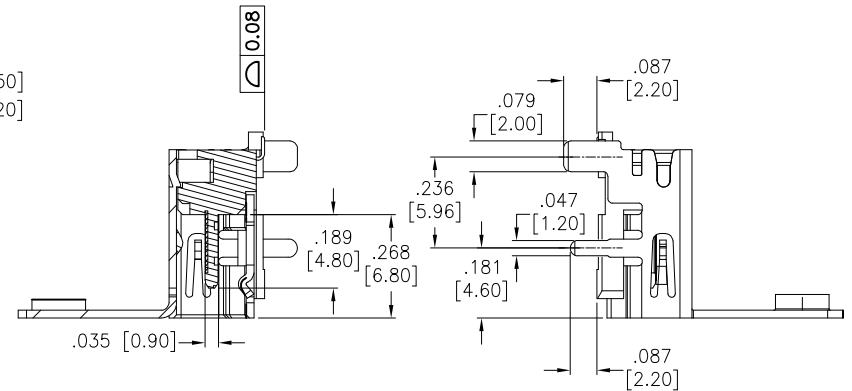
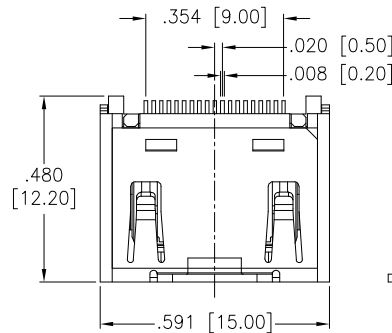


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/9/14	

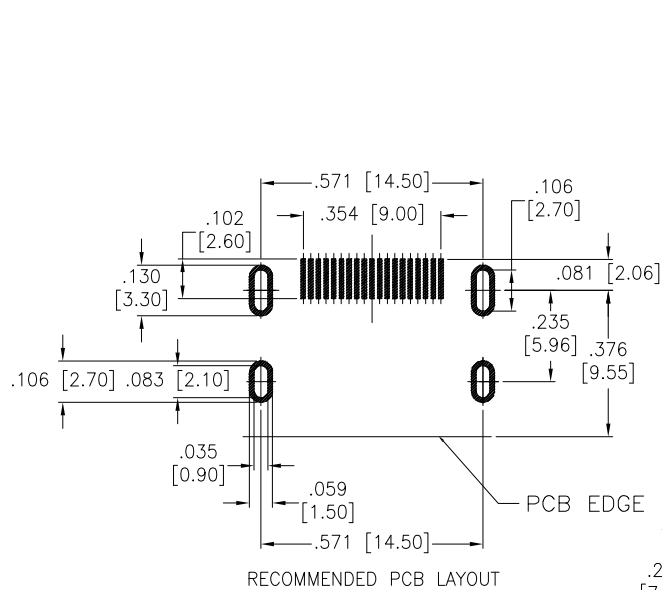

SECTION A-A
SCALE 1:1

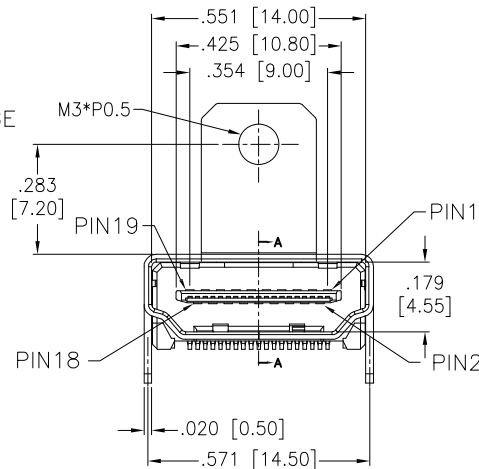

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on Solder tails.

Electrical:

Voltage rating: 40V AC/DC Max.

Current rating: 0.5A AC/DC Max.

Contact resistance: 10 mohms max.

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	AY	4/30/14	
CHECKED	NP	4/30/14	
APPROVED			



TITLE HDMI CONNECTOR, RIGHT ANGLE, SURFACE MOUNT, W / FLANGE, W/O RIB			
SIZE X	PART NO. HDMI-S-RA7-SMT-LMF-SPCC	REV. -	
REF: S00167T	SCALE: NTS	SHEET 1 OF 1	