
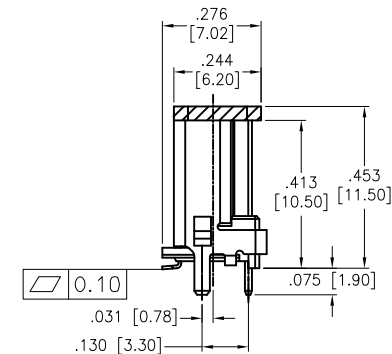

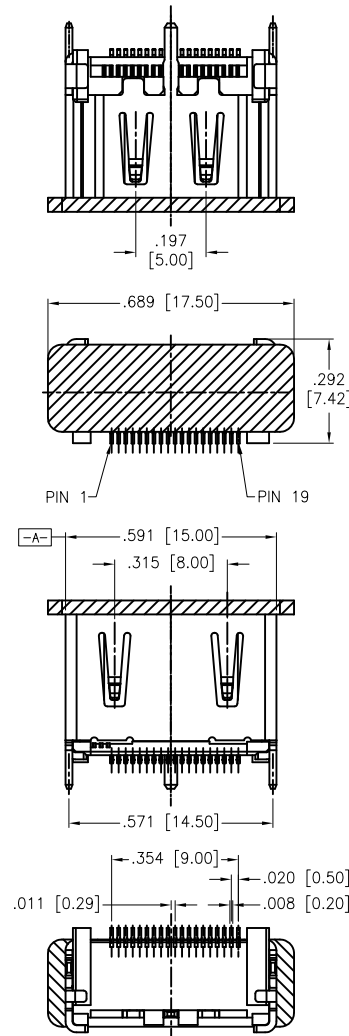


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/15	
A		UPDATED DIM.	3/27/17	HR/DH
B		UPDATE DRAWING	5/9/17	AY/DH
C		UPDATE TEMPERATURE	1/11/22	LH/LW

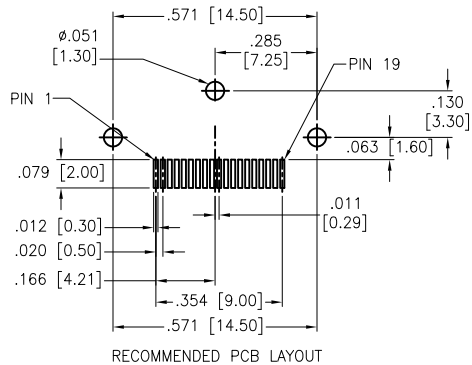

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shield: Copper Alloy, Nickel plated

Plating:

5u" Gold over Nickel underplate on contact area,

Matte Tin over Nickel underplate on PCB tails

Electrical:

Operating voltage: 40V

Current rating: 0.5A

Contact resistance: 10 mohms max

Insulation resistance: 100 Mohms min @ 500 VDC (Unmated)

10 Mohms min @ 150 VDC (Mated)

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	HR	5/25/15
CHECKED	CH	5/25/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE		HDMI RECEPTACLE, VERTICAL, W/ DUST COVER, TAPE & REEL	
SIZE	PART NO.	REV.	
X	HDMI-S-V-02-SMT-DC-T/R	C	
REF:	S00005C	SCALE:	NTS
SHEET		1 OF 1	