

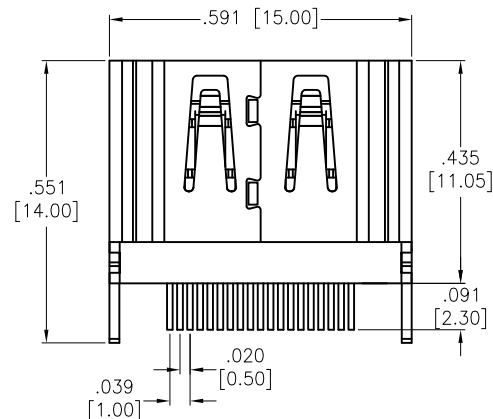


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/14	
A		UPDATE SPEC.	3/1/17	AY/MY
B		UPDATE DRAWING	3/31/17	AY/MY

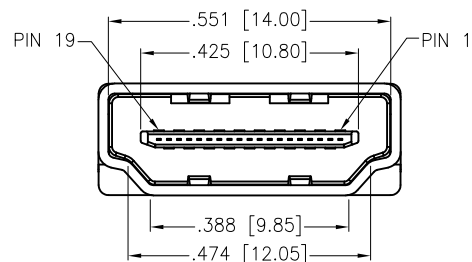

SPECIFICATIONS:

Material:

Housing: Hi-Temp Thermoplastic, rated UL 94V-0, color: Black

Insert(Molding): Hi-Temp Thermoplastic, rated UL 94V-0, color: Black

Retainer: Hi-Temp Thermoplastic, rated UL 94V-0, color: Black

Contacts: Phosphor Bronze

Shell: Brass, Nickel plated

Plating:

Gold over Nickel underplate on contact area,

Tin over Nickel underplate on Solder tails.

Electrical:

Operating voltage: 30 VAC max

Current rating: 0.5 Amp per contact.

Contact resistance: 30 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
INCHES HOLES				
.X	± .10	Ø.X	±.10	
.XX	± .020	Ø.XX	±.015	
.XXX	± .015	Ø.XXX	±.010	
APPROVALS		DATE		
DRAWN	AY	5/5/14		
CHECKED	SC	5/5/14		
APPROVED				
TITLE		HDMI CONNECTOR, VERTICAL, THRU-HOLE STRADDLE MOUNT		
SIZE	PART NO.		REV.	
X	HDMI-S-V-1-SM		B	
REF:	S00097C	SCALE:	NTS	SHEET 1 OF 1