
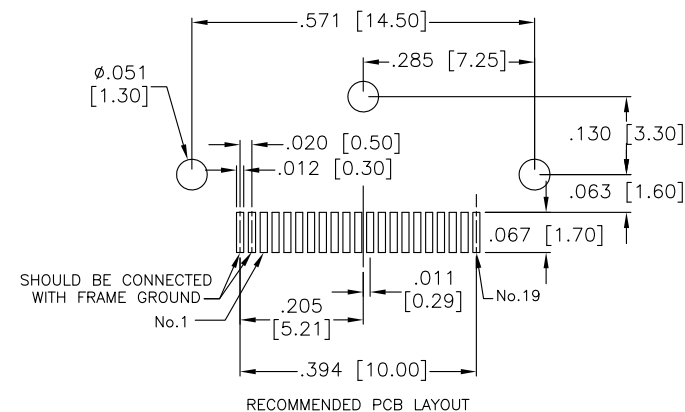
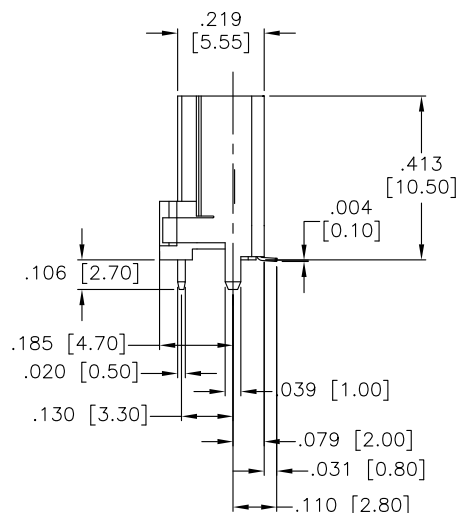
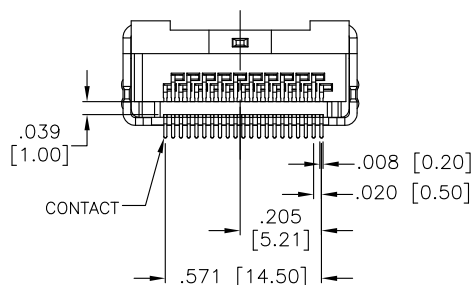
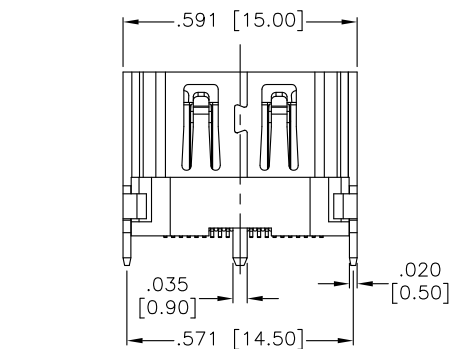


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/12/15	

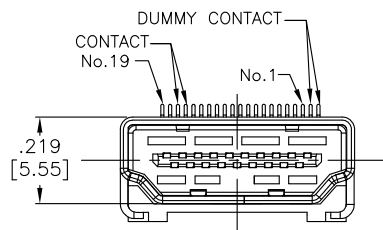

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Phosphor Bronze

Shield: Phosphor Bronze, Nickel plated.

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 500VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 30 mohms max.

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	5/12/15
CHECKED	NC	5/12/15
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE
HDMI RECEPTACLE, VERTICAL, SMT TYPE

SIZE X	PART NO. HDMI-S-V-1-SMT	REV. -
REF: S00005C	SCALE: NTS	SHEET 1 OF 1