




APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_




| Rev | AWO # | Description | Date   | Appr |
|-----|-------|-------------|--------|------|
| -   |       | RELEASED    | 3/2/20 |      |

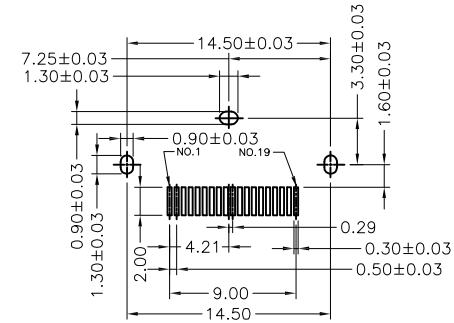

WITHOUT COVER

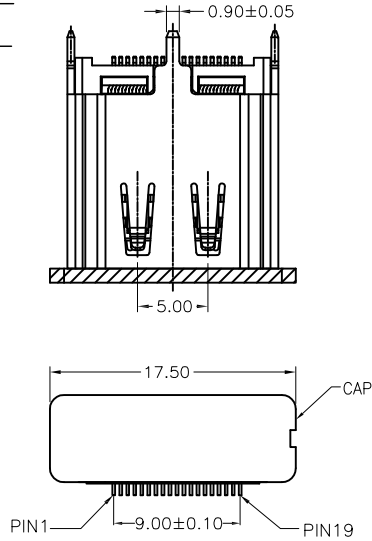

RECOMMENDED PCB LAYOUT

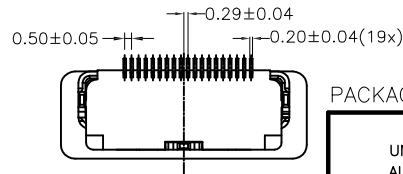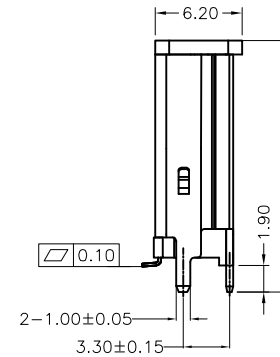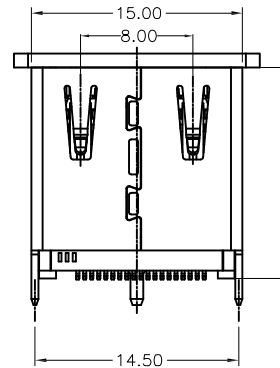

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material:

Housing: Hi-Temp Thermoplastic, rated UL 94V-0, Color: Black

Contacts: Copper Alloy

Shell: Copper Alloy, Nickel plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 0.5 A

Voltage rating: 40 V

Contact resistance: 10 mohms max

Insulation resistance: (unmated) 100 Mohms min @500 VDC  
(mated) 10 Mohms min @150VDC

Dielectric withstanding voltage: 300 VAC min For 1 Minute

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM ANGLE  
.X ± 0.35 X° ± 2°  
.XX ± 0.25 .X° ± 1°  
.XXX ± 0.15

| APPROVALS |    | DATE   |
|-----------|----|--------|
| DRAWN     | LH | 3/2/20 |
| CHECKED   | IW | 3/2/20 |
| APPROVED  |    |        |



TITLE  
HDMI CONNECTOR, SINGLE, VERTICAL WITH  
DUST COVER, SURFACE MOUNT

|              |                                     |              |
|--------------|-------------------------------------|--------------|
| SIZE<br>X    | PART NO.<br>HDMI-S-V-SMT-CS2-DC-T/R | REV.<br>-    |
| REF: S00005C | SCALE: NTS                          | SHEET 1 OF 1 |