

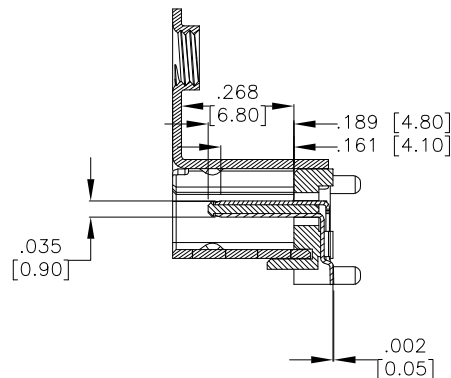





6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/09	

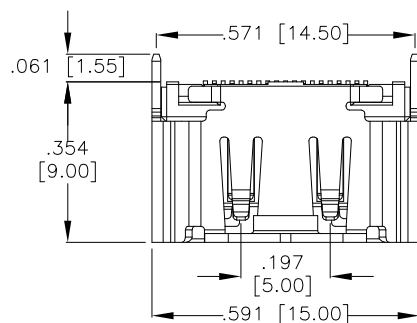

DETAIL A
SCALE 10:1

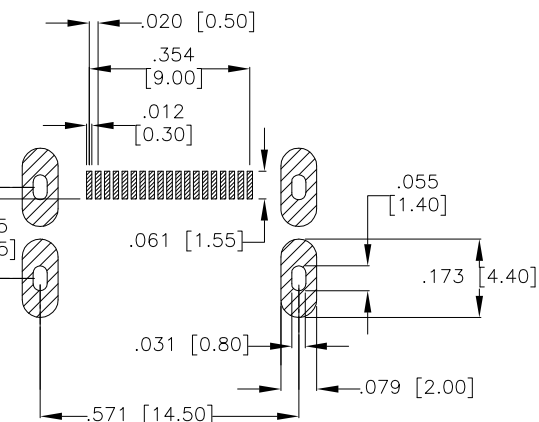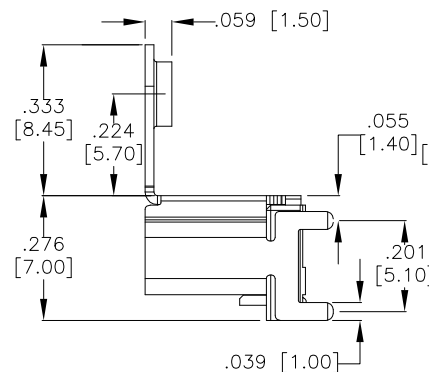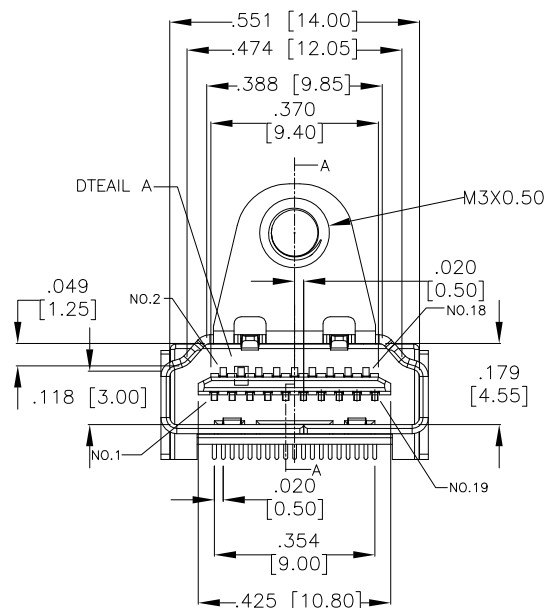

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Phosphor Bronze

Shield: Brass

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 500VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 30 mohms max.

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	DY	3/24/09
CHECKED		
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE
HDMI CONNECTOR WITH MOUNTING FLANGE
TRUE SMT TYPE

SIZE X	PART NO. HDMI-S-V-TSMT-MF-15-T/R	REV. -
REF: S00005C	SCALE: NTS	SHEET 1 OF 1