

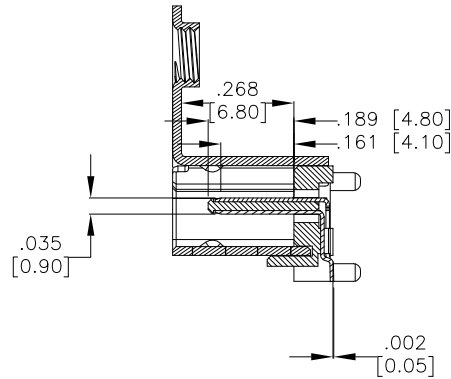





6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/09	

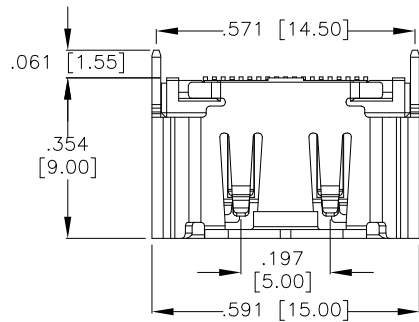

DETAIL A
SCALE 10:1

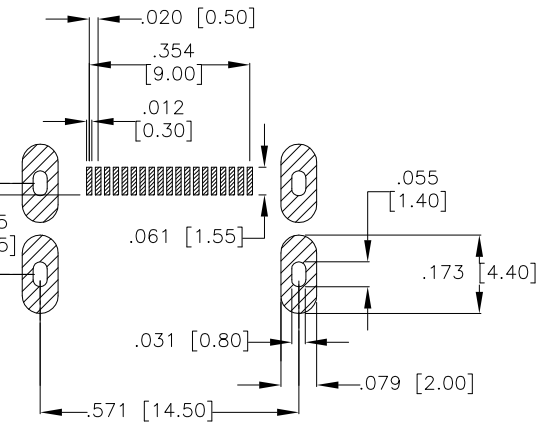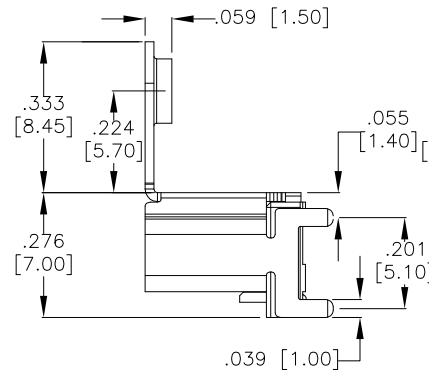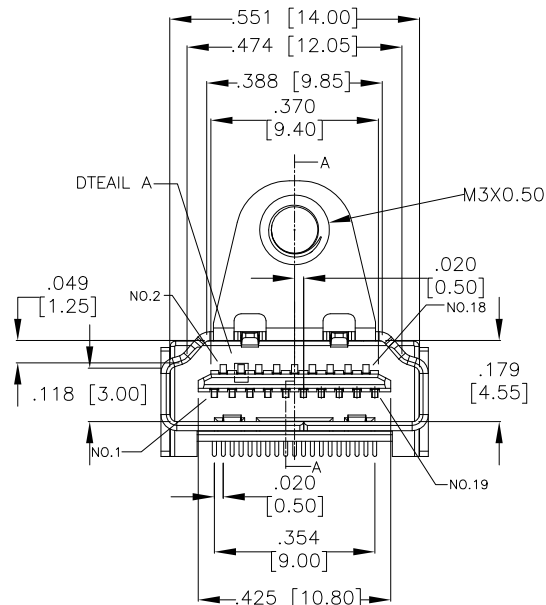

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Phosphor Bronze

Shield: Brass

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Dielectric strength: 500VAC for 1 minute min.

Insulation resistance: 100 Megohm min.

Contact resistance: 30 mohms max.

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
INCHES		HOLES			
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XX	± .015		
.XXX	± .015	Ø.XXX	± .010	TITLE HDMI CONNECTOR WITH MOUNTING FLANGE TRUE SMT TYPE	
APPROVALS		DATE			
DRAWN	DY	3/24/09			
CHECKED					
APPROVED					
SIZE X		PART NO. HDMI-S-V-TSMT-MF		REV. .	
REF: S00005C		SCALE: NTS		SHEET 1 OF 1	