

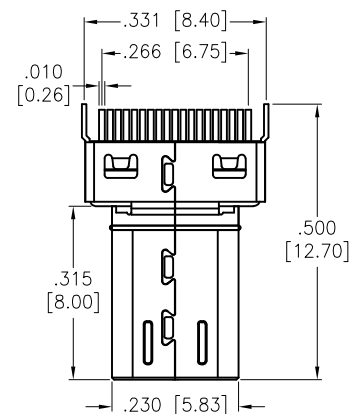
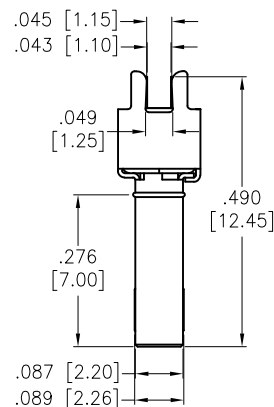
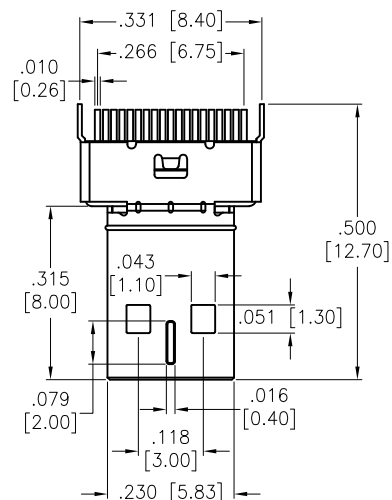


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/18/20	

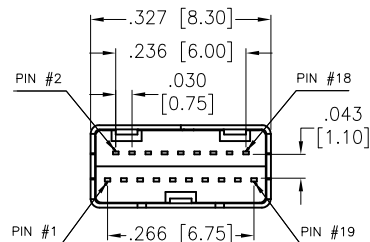

SPECIFICATIONS:

Material:

Insulator: LCP, UL 94V-0

Insulator color: Black

Contact: Copper Alloy

Shell: Brass, Gold over Nickel plated

Plating:

Gold Flash over Nickel underplate on contact area,

Matte Tin over Nickel underplate on solder tails.

Electrical:

Voltage rating: 40 AC/DC max

Current rating: 0.3 A max

Contact resistance: 30 mohms max

Insulation resistance: 10 Mohms min @150 VDC

Dielectric withstanding voltage: 150 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	LH	2/18/20
CHECKED	IW	2/18/20
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
MICRO HDMI D TYPE PLUG, STRADDLE MOUNT			
SIZE	PART NO.	REV.	
X	MCHDMI-PLUG-OM2	-	
REF:	S00087T	SCALE:	NTS
SHEET 1 OF 1			