
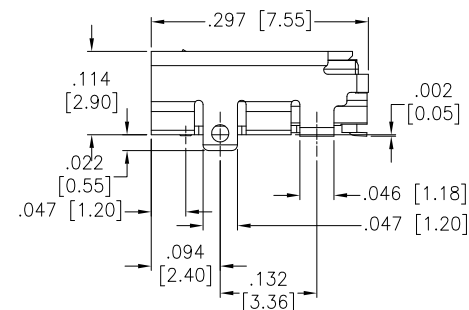
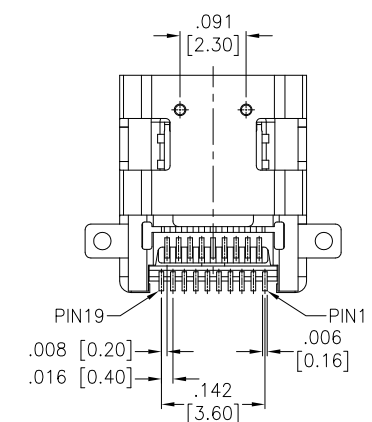
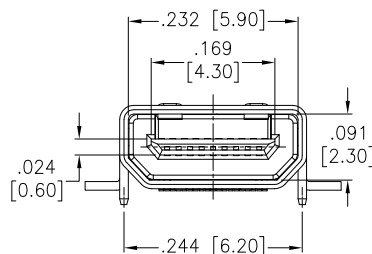
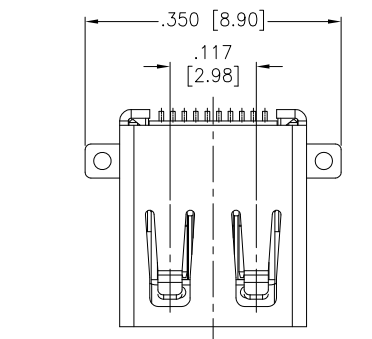


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/20/14	

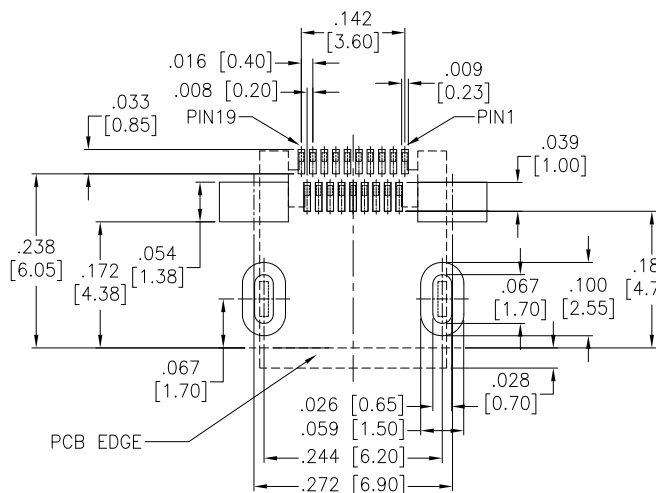

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: Stainless Steel

Plating:

Gold flash over Nickel underplate on contact area,

Matte Tin over Nickel underplate on solder tails

Electrical:

Operating voltage: 40 VAC max.

Current rating: 0.3 Amp max.

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Mechanical:

Insertion Force: 44.1N max

Extraction Force 5~25N min

Mating Cycles: 5,000 Cycles

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	HR	3/20/14
CHECKED	SL	3/20/14
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
MICRO HDMI, SINGLE PORT, RIGHT ANGLE, SMT			
SIZE	PART NO.	REV.	
X	MCHDMI-S-RA-3-SMT	-	
REF:	S00097C	SCALE:	NTS
SHEET 1		OF 1	