
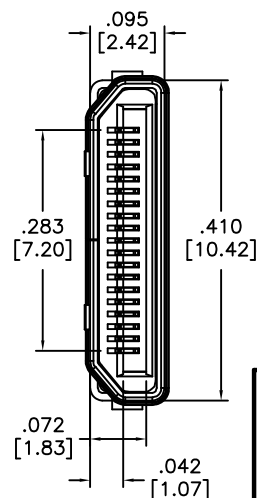
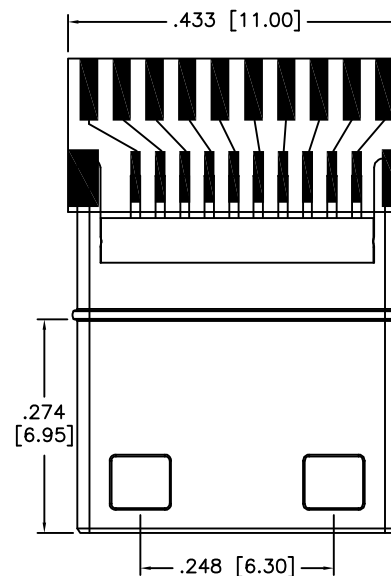
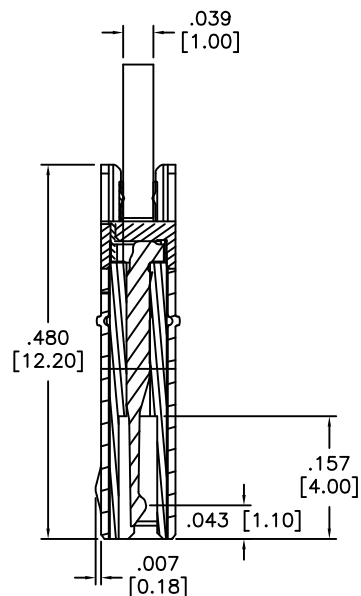


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/3/14	

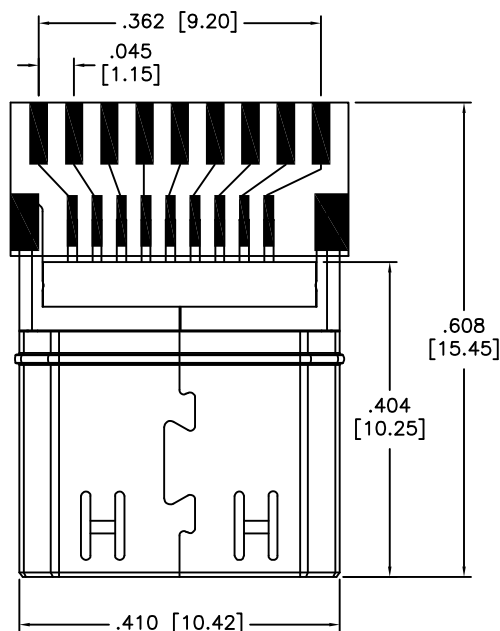

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Copper Alloy, Sel Gold plated.

Shell: SPCC, Nickel plated

Electrical:

Rated Contact: 0.5A Max.

Rated Voltage: 40V AC/DC Max.

Withstanding voltage: 150 VAC for 1minute.

Insulation resistance: 150 Megaohms Min.

Contact resistance: 10 milliohms Max.

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
.X ± .10	Ø.X ± .10		TITLE HDMI MALE CONNECTOR, SOLDER TYPE MALE, OVER MOLDING TYPE	
.XX ± .020	Ø.XX ± .015			
.XXX ± .015	Ø.XXX ± .010		SIZE X	PART NO. MHDMI-PLUG-OM3
APPROVALS			REF: S00097C	SCALE: NTS
DRAWN	AY	3/3/14	SHEET 1 OF 1	
CHECKED	YC	3/3/14		
APPROVED				