
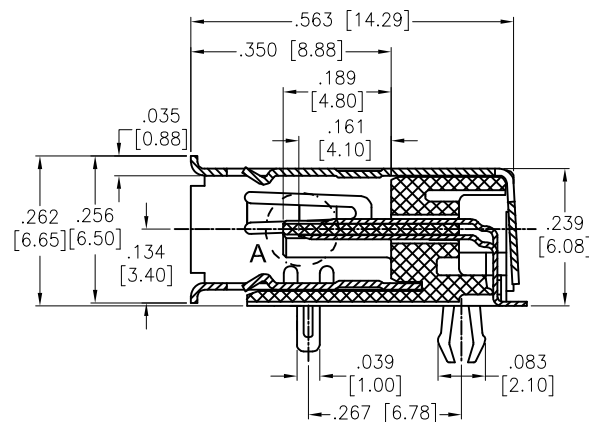
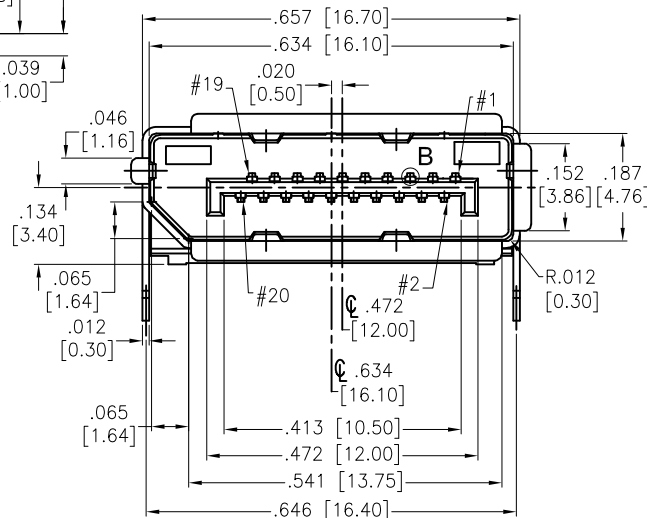


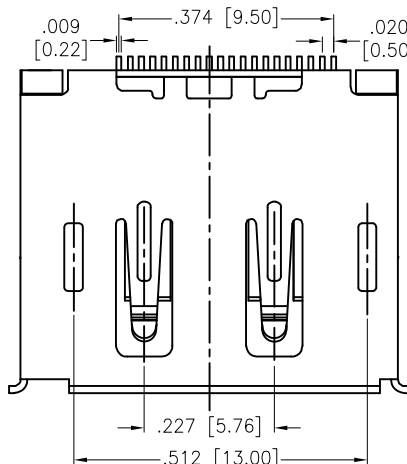


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/9/15	
A		UPDATE SPEC	7/16/18	AY/RC1

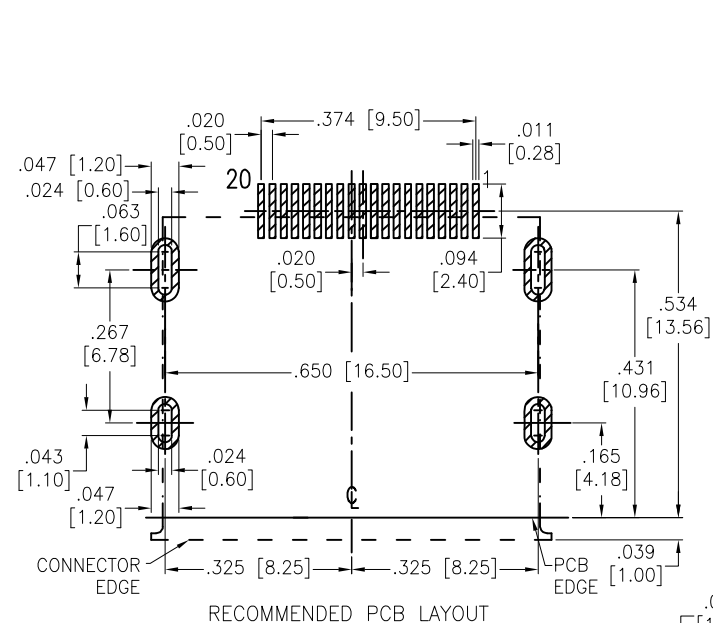

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Brass

Shell: Brass, Nickel plated

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Operating voltage: 40 VAC max

Current rating: 0.5 Ampere per contact

Contact Resistance: 30 mohms max.

Insulation Resistance: 100 Mohms min.

Withstanding Voltage: 500 VDC

Temperature Rating:

Operating temperature: -40°C to +85°C

Environment:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS

DATE

DRAWN

AY

9/9/15

CHECKED

OC

9/9/15

APPROVED



TITLE

DISPLAYPORT RECEPTACLE, R/A, SMT TYPE
20 PINS, W/ BOARDLOCK

SIZE

PART NO.

DPC-F-S-RA-SMT-BL-15-T/R

REV.

A

REF: S00078T

SCALE: NTS

SHEET 1 OF 1