
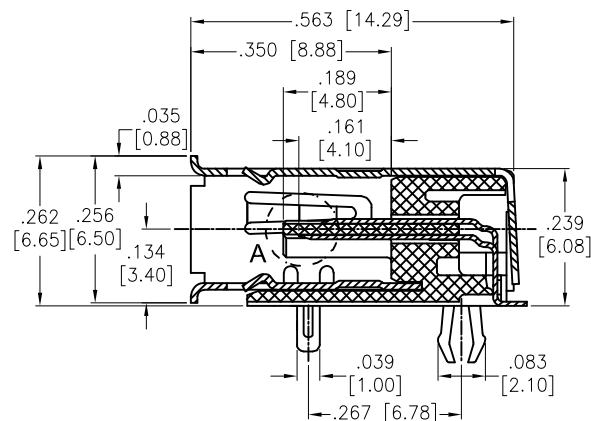
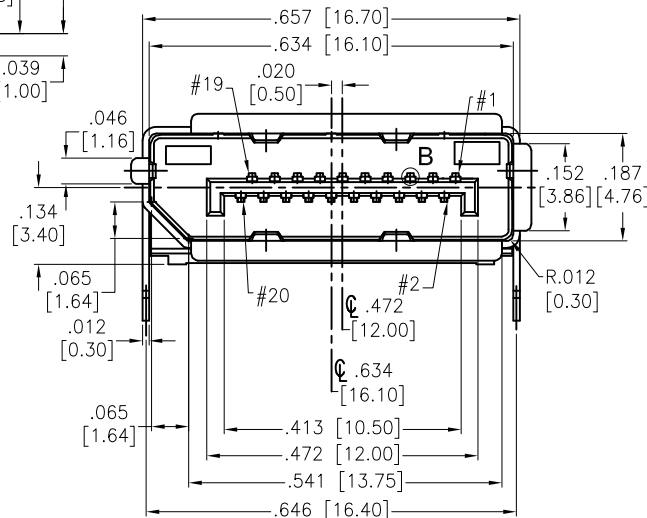


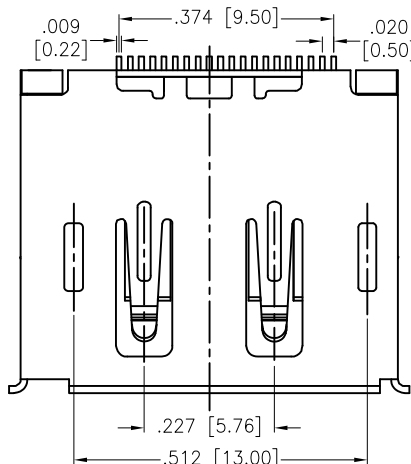


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/14	
A		UPDATE SPEC	7/16/18	AY/RC1

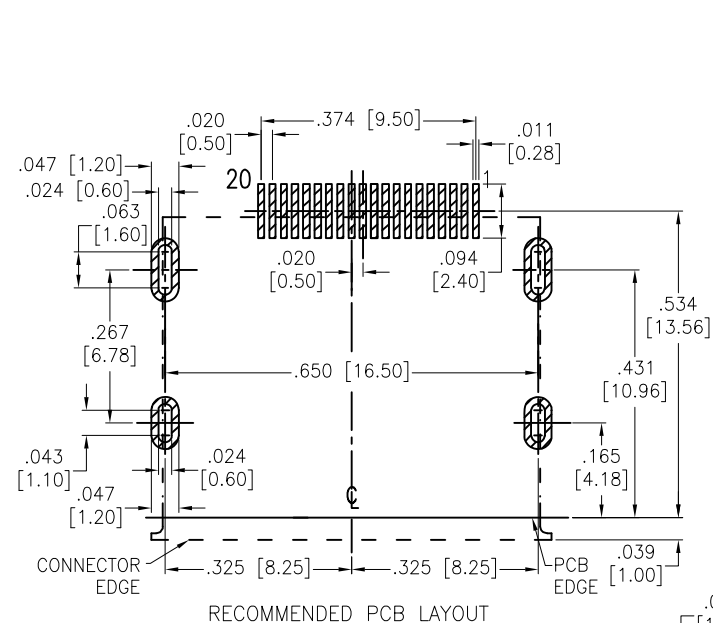

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contact: Brass
 Shell: Brass, Nickel plated
 Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Nickel underplate on solder tails
 Electrical:
 Operating voltage: 40 VAC max
 Current rating: 0.5 Ampere per contact
 Contact Resistance: 30 mohms max.
 Insulation Resistance: 100 Mohms min.
 Withstanding Voltage: 500 VDC
 Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010					
APPROVALS			TITLE		
DATE			DISPLAYPORT RECEPTACLE, R/A, SMT TYPE		
DRAWN			20 PINS, W/ BOARDLOCK		
AY					
8/5/14					
CHECKED			SIZE		
NP			X		
8/5/14			PART NO.		
			DPC-F-S-RA-SMT-BL		
APPROVED			REV.		
			A		
			REF: S00078T		
			SCALE: NTS		
			SHEET 1 OF 1		