
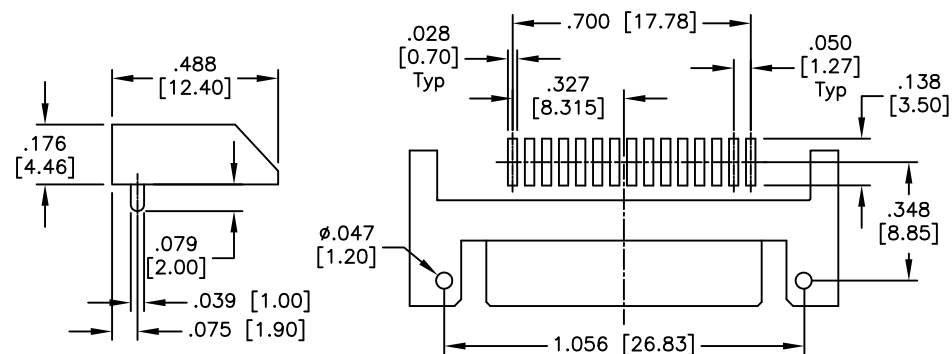


6 5 4 3 2 1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/05/10	

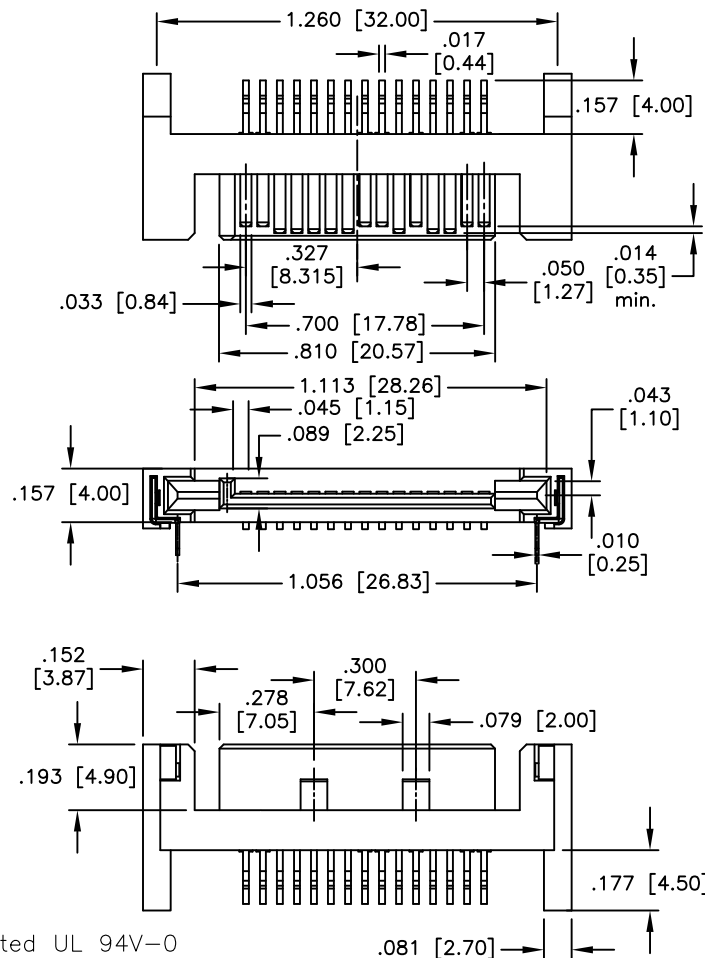

SPECIFICATIONS:

Material:
Insulator: LCP, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold Flash over Nickel underplate on contact area,
Tin over Copper underplate on solder tails
Electrical:
Current rating: 1.5 Amps per contact
Contact resistance: 30 mohms max
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -55°C to +125°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
.X ± .10	ØX ± .10			
.XX ± .020	ØXX ± .015		TITLE SATA CONNECTOR, 15PIN, MALE, RIGHT ANGLE, SMT TYPE	
.XXX ± .015	ØXXX ± .010		SIZE X	PART NO. SATA-A5-PR-SMT
APPROVALS		DATE	REF: S00154T	SCALE: NTS
DRAWN	DY	5/05/10	SHEET 1 OF 1	
CHECKED				
APPROVED				
			REV. -	