
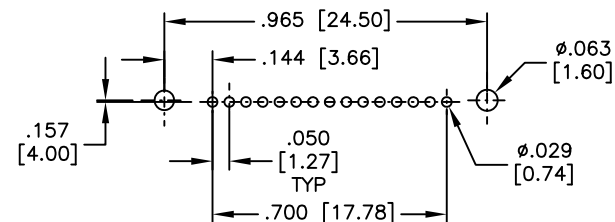
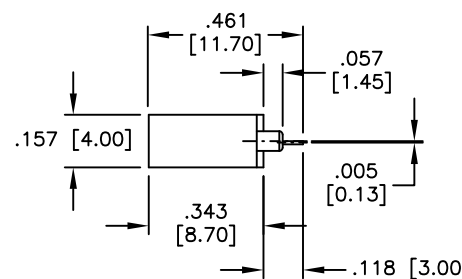
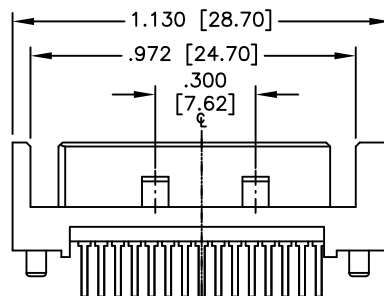
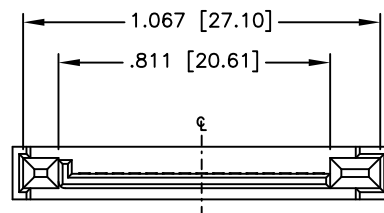


6 5 4 3 2 1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/10	

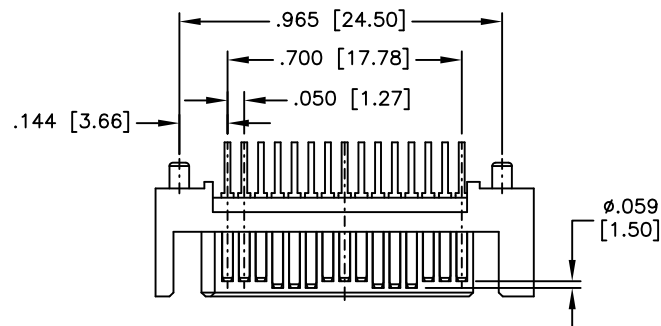

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: LCP, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails
 Electrical:
 Current rating: 1.5 Amps per contact
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 Operating temperature: -55°C to +125°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
APPROVALS			TITLE		
DATE			SATA CONNECTOR, 15PIN, MALE, VERTICLE THRU-HOLE, DIP TYPE		
DRAWN	DY	5/26/10	SIZE	PART NO.	REV.
CHECKED			X	SATA-A6-NP-VT	-
APPROVED			REF:	S00154T	SCALE: NTS
			SHEET 1 OF 1		