



APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_


| Rev | AWO # | Description | Date    | Appr  |
|-----|-------|-------------|---------|-------|
| -   |       | RELEASED    | 6/18/14 |       |
| A   |       | REDRAWN     | 7/1/14  | HR/NP |

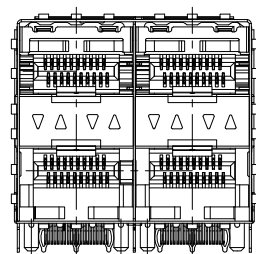




WITH INNER/OUTER LIGHT PIPES  
ADAM P/N: SFCJ-4A-LP3

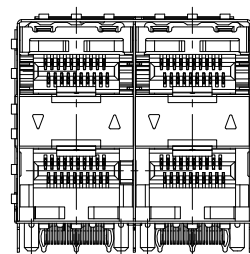

WITH OUTER LIGHT PIPES  
ADAM P/N: SFCJ-4A-LP2

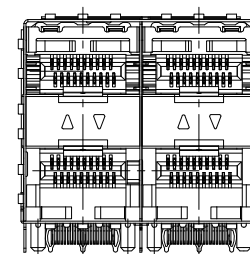

WITH INNER LIGHT PIPES  
ADAM P/N: SFCJ-4A-LP1

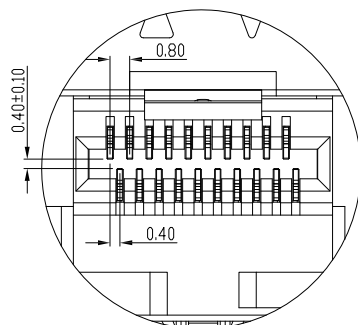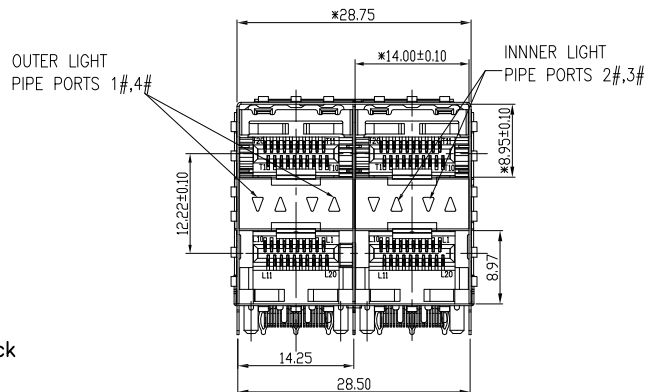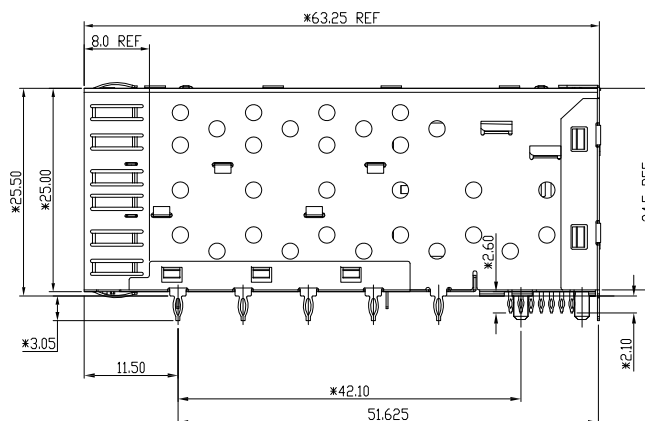

#### SPECIFICATIONS:

##### Material:

Connector Housing: LCP, rated UL 94V-0, Color: Black

Moulded Inset: PA46, glass reinforced, Color: Black

Light Pipes: Polycarbonate, UL 94V-0, Color: Clear

Light Pipe Housing: PBT, glass reinforced, rated UL 94V-0, Color: Black

Contact: Phosphor Bronze

Cage: Cupronickel

Plating:

15u" gold over Nickel underplate on contact area.

##### Electrical:

Operating voltage: 120 VAC max

Current rating: 0.5 Amps max

Contact resistance: 40 milliohms max initial.

Insulation resistance: 1000 mohms min.

Dielectric withstanding voltage: 750 VAC max.

Temperature Rating:

Operating temperature: -55°C to +105°C

Storage temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM Angles  
.X ± .30  
.XX ± .25 ± .50  
.XXX ± .15

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | HR | 6/18/14 |
| CHECKED   | NP | 6/18/14 |
| APPROVED  |    |         |



| TITLE                            |                         |              |  |
|----------------------------------|-------------------------|--------------|--|
| SFP MULTI PORT GANGED, 2X2 PORTS |                         |              |  |
| SIZE<br>X                        | PART NO.<br>SFCJ-4A-LPX | REV.<br>A    |  |
| REF: S00005C                     | SCALE: NTS              | SHEET 1 OF 4 |  |

6

5

4

3


2

1


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev                         | AWO # | Description | Date | Appr |
|-----------------------------|-------|-------------|------|------|
| SEE SHT 1 OF 4 FOR REVISION |       |             |      |      |

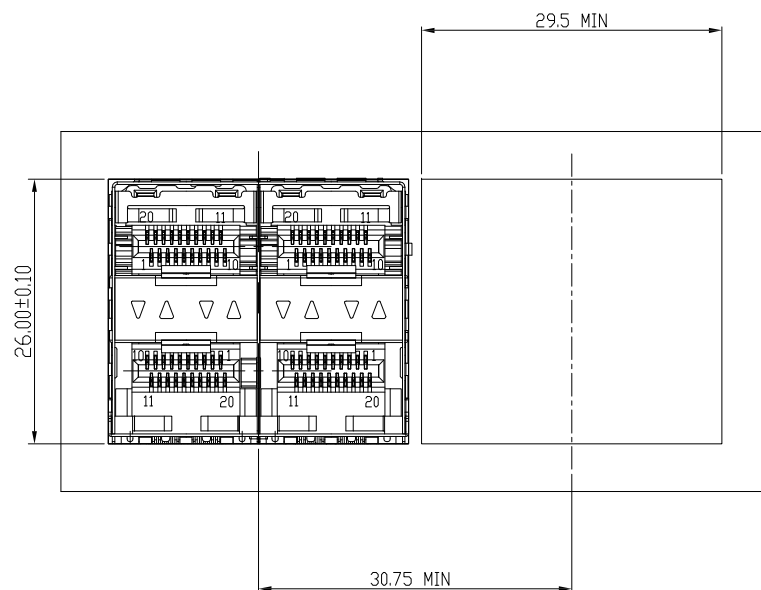

BEZEL CUT-OUT CENTER SPACING DETAIL  
BEZEL THICKNESS:0.8-2.6

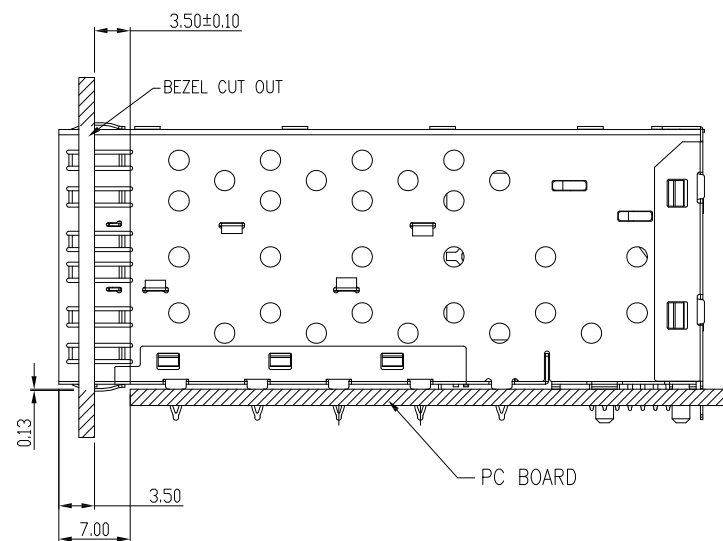

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM Angles  
.X ± .30  
.XX ± .25 ± .50  
.XXX ± .15

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | HR | 6/18/14 |
| CHECKED   | NP | 6/18/14 |
| APPROVED  |    |         |



TITLE  
SFP MULTI PORT GANGED, 2X2 PORTS

|           |                         |           |
|-----------|-------------------------|-----------|
| SIZE<br>X | PART NO.<br>SFCJ-4A-LPX | REV.<br>A |
|-----------|-------------------------|-----------|

|              |            |              |
|--------------|------------|--------------|
| REF: S00005C | SCALE: NTS | SHEET 2 OF 4 |
|--------------|------------|--------------|

6

5

4

3

2

1

6

5

4

3

2



1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev AWO # Description Date Appr

SEE SHT 1 OF 4 FOR REVISION

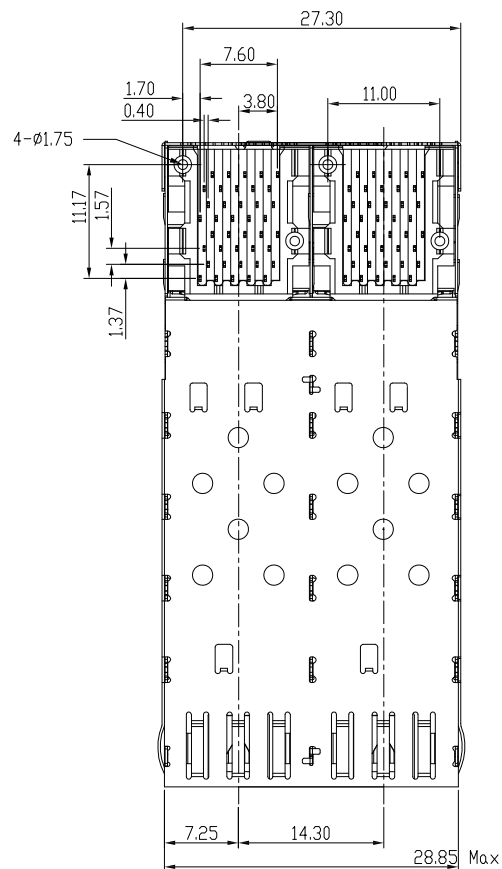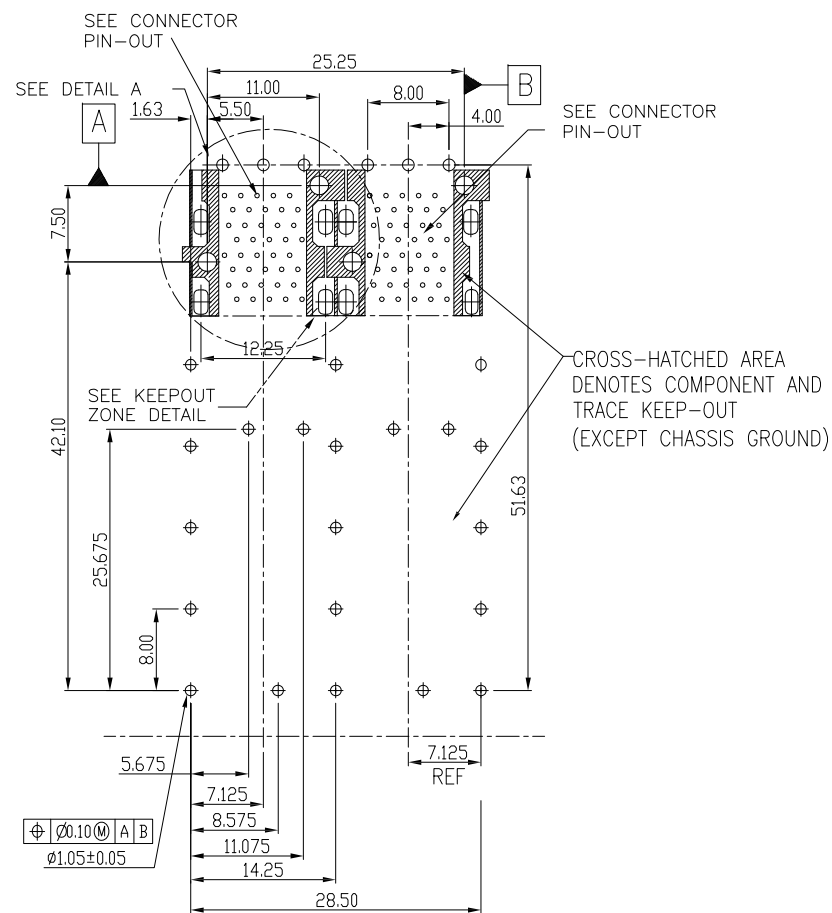

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MILLIMETERS  
TOLERANCES: EXCEPT AS NOTED  
MM Angles  
.X ± .30  
.XX ± .25  
.XXX ± .15 ± .50



TITLE




SFP MULTI PORT GANGED, 2X2 PORTS

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | HR | 6/18/14 |
| CHECKED   | NP | 6/18/14 |
| APPROVED  |    |         |

|              |                         |              |
|--------------|-------------------------|--------------|
| SIZE<br>X    | PART NO.<br>SFCJ-4A-LPX | REV.<br>A    |
| REF: S00005C | SCALE: NTS              | SHEET 3 OF 4 |

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev                         | AWO # | Description | Date | Appr |
|-----------------------------|-------|-------------|------|------|
| SEE SHT 1 OF 4 FOR REVISION |       |             |      |      |

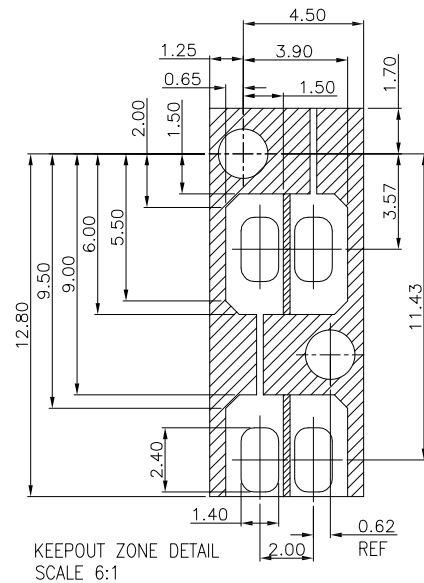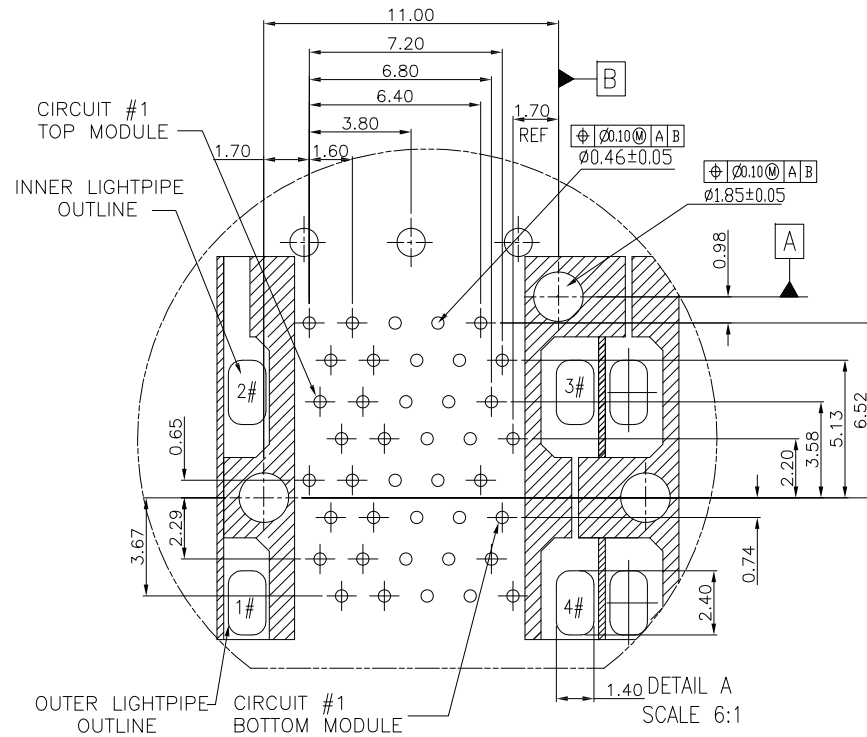

|                                                                                             |    |         |                                           |             |
|---------------------------------------------------------------------------------------------|----|---------|-------------------------------------------|-------------|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE MILLIMETERS<br>TOLERANCES: EXCEPT AS NOTED |    |         | <b>IETABEE</b>                            |             |
| MM<br>.X ± .30<br>.XX ± .25<br>.XXX ± .15                                                   |    |         | TITLE<br>SFP MULTI PORT GANGED, 2X2 PORTS |             |
| APPROVALS                                                                                   |    | DATE    | SIZE                                      | PART NO.    |
| DRAWN                                                                                       | HR | 6/18/14 | X                                         | SFCJ-4A-LPX |
| CHECKED                                                                                     | NP | 6/18/14 |                                           |             |
| APPROVED                                                                                    |    |         | REF: S00005C                              | SCALE: NTS  |
|                                                                                             |    |         | SHEET 4 OF 4                              | REV. A      |