
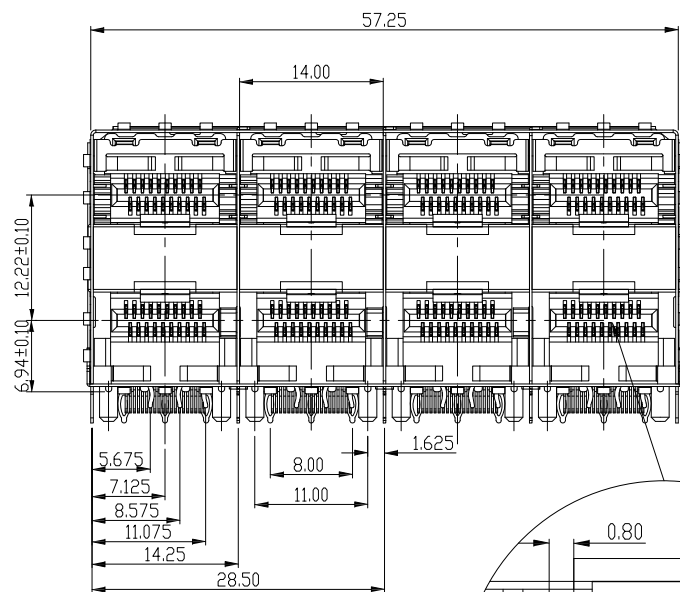
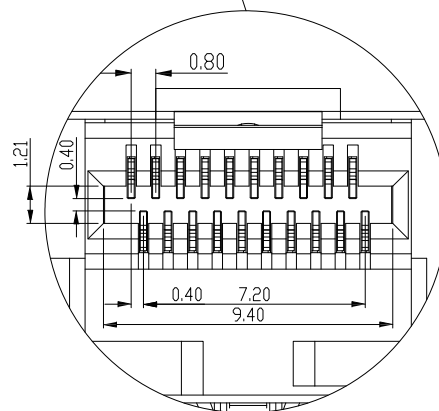


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/30/10	

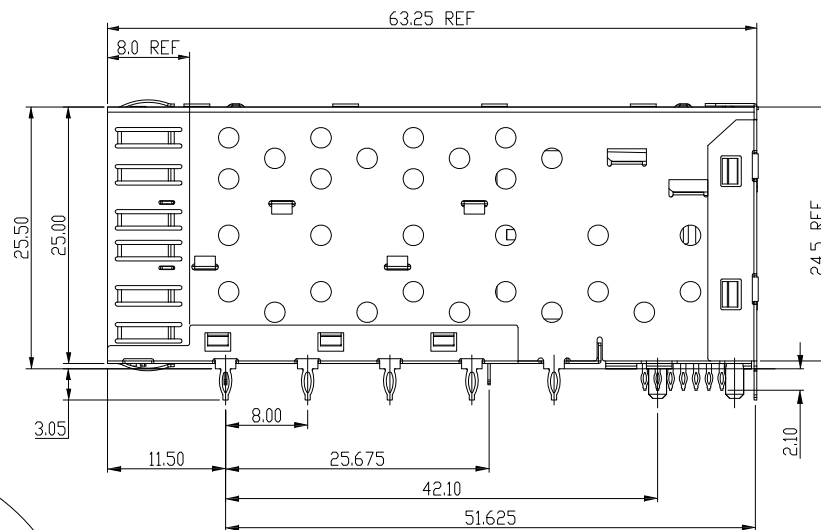

SPECIFICATIONS:

Material:
 Housing: Hi-temp thermoplastic, glass reinforced, rated UL 94V-0
 Housing color: Black
 Contact: Copper Alloy
 Cage: Copper Alloy
 Plating:
 15u" gold over Nickel underplate on contact area.
 Electrical:
 Contact resistance: 40 milliohms max initial.
 Dielectric withstanding voltage: 300 AC/Min.
 Temperature Rating:
 Operating temperature: -55°C to +85°C
 Storage temperature: -55°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM Angles .X ± .30 .XX ± .25 .XXX ± .15				
APPROVALS DRAWN DY CHECKED APPROVED			TITLE SFP MULTI PORT GANGED, 2X4	
DATE 4/30/10			SIZE X	PART NO. SFCJ-8
REF: S00005C			SCALE: NTS	SHEET 1 OF 4

6

5

4

3

2

1

Rev

AWO #

Description

Date

Appr

APPROVED: _____

DATE: _____ TITLE: _____

SEE SHT 1 OF 4 FOR REVISION

D

D

C


C

B


B

A

A

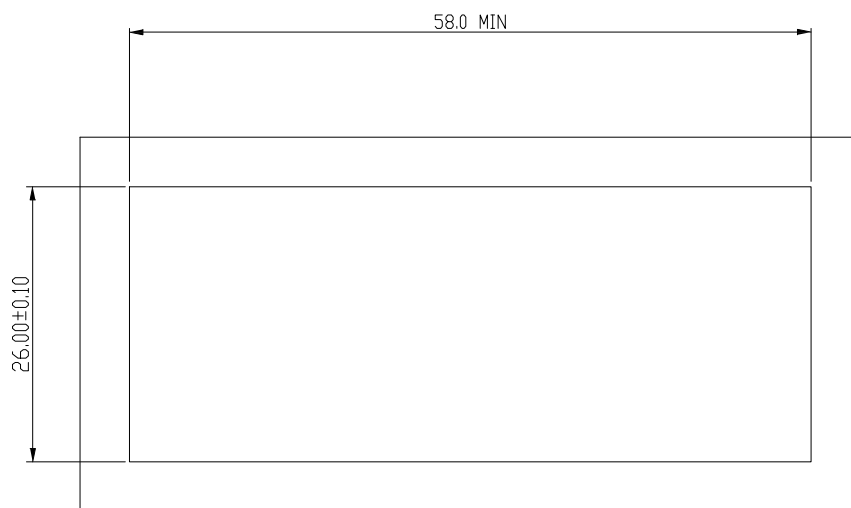

BEZEL CUT-OUT CENTER SPACING DETAIL
BEZEL THICKNESS:0.8-2.6

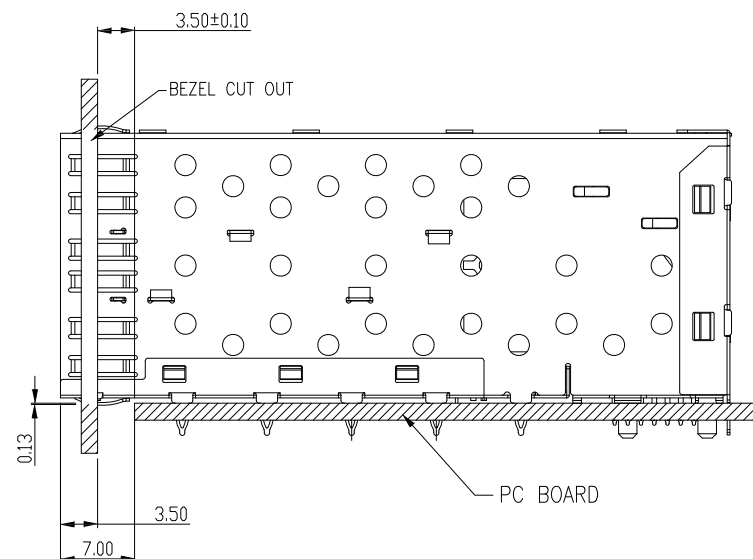

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM Angles
.X ± .30
.XX ± .25 ± .50
.XXX ± .15

APPROVALS

DATE

DRAWN

DY

4/30/10

CHECKED

APPROVED

TITLE

SFP MULTI PORT GANGED, 2X4

SIZE

X

PART NO.

SFCJ-8

REV.

-

REF: S00005C

SCALE: NTS

SHEET 2 OF 4

6

5

4

3

2

1

