
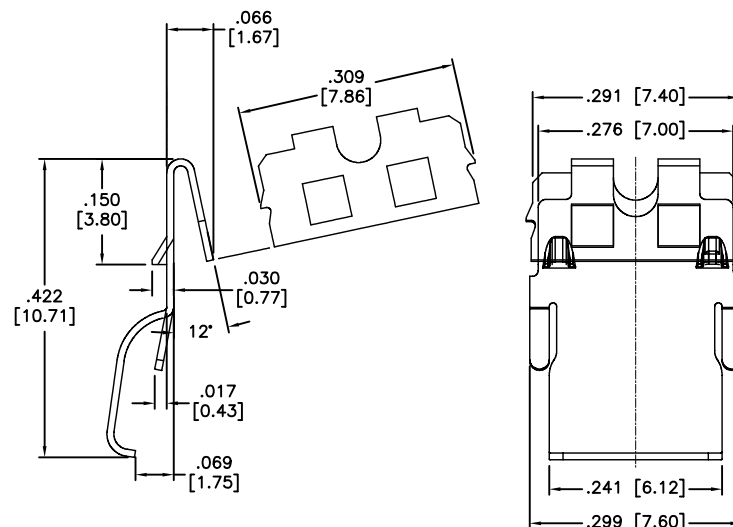
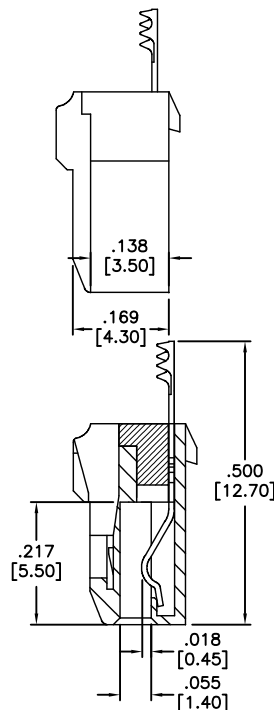


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/16/12	

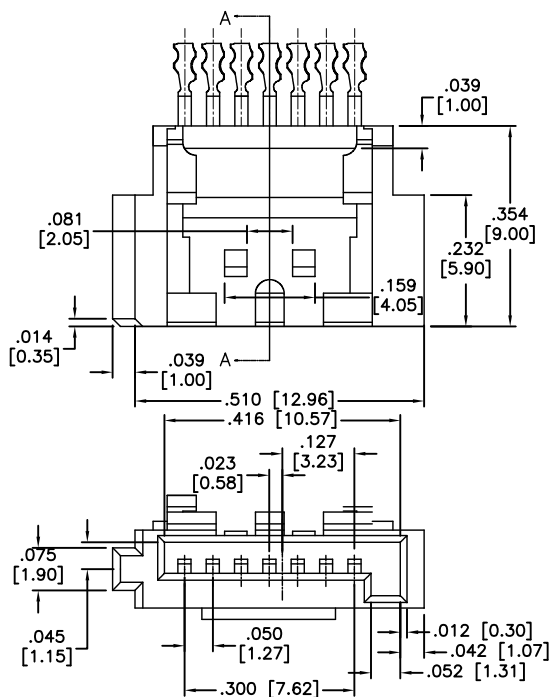

SHORT LATCH

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Short Latch: Stainless steel

Plating:

Gold flash over Nickel underplate on mating area,

Tin over Copper underplate on tails

Electrical:

Current rating: 1.5A @40V AC

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010



TITLE
SATA CONNECTOR, 7P, FEMALE, W / LATCH
OVER MOLDING TYPE

APPROVALS		DATE
DRAWN	AY	10/16/12
CHECKED	AH	10/16/12
APPROVED		

SIZE	PART NO.	REV.
X	SATA-A-7P-F-OM	-
REF: S00075C		SCALE: NTS
		SHEET 1 OF 1