


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/18/11	

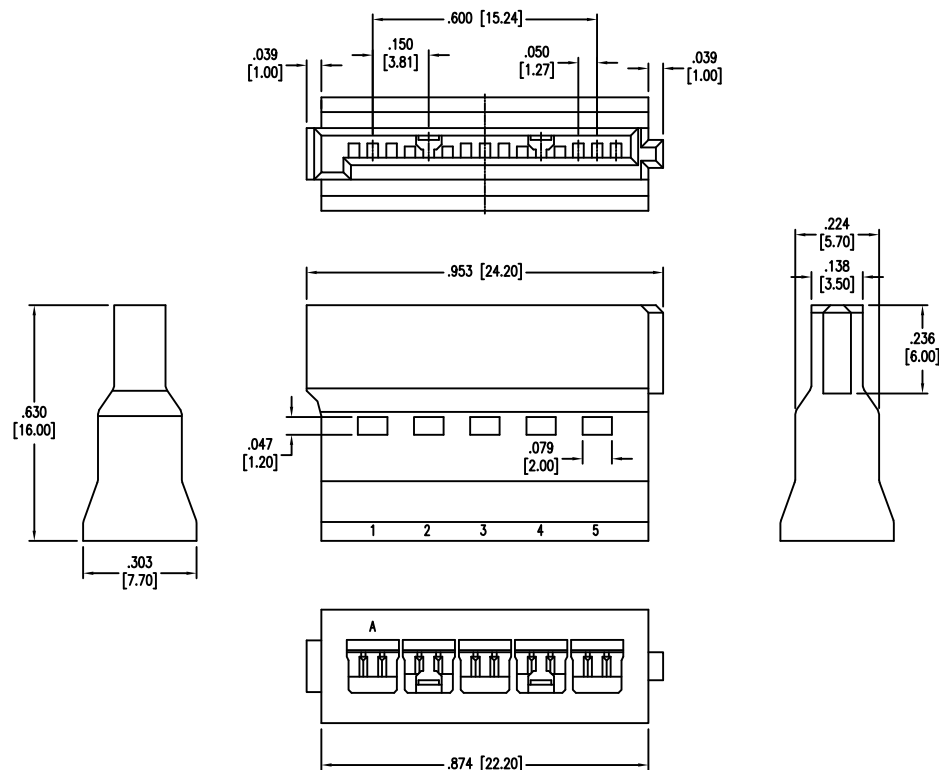

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Electrical:
 Operation voltage: UL&CSA 30 V AC/DC
 Current rating: UL 8.3 Amps, CSA 3.0 Amps
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
APPROVALS			TITLE		
DATE		SATA CRIMP HOUSING 15 PIN			
DRAWN	AY	4/18/11			
CHECKED	VW	4/18/11			
APPROVED					
SIZE	PART NO.	SATA-CH-A-15P		REV.	
X				-	
REF:	S00173T	SCALE:	NTS	SHEET	1 OF 1