

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/21/11	

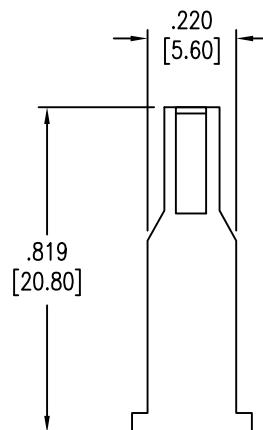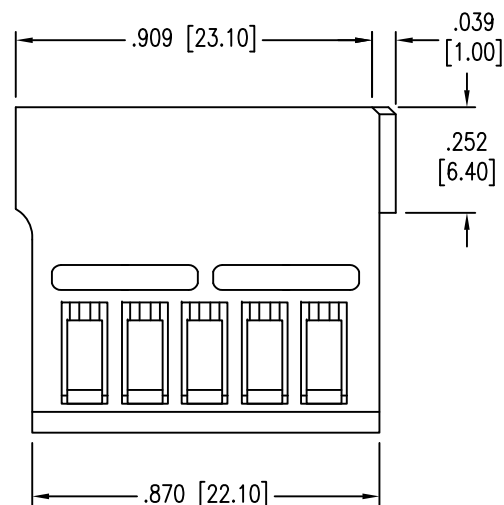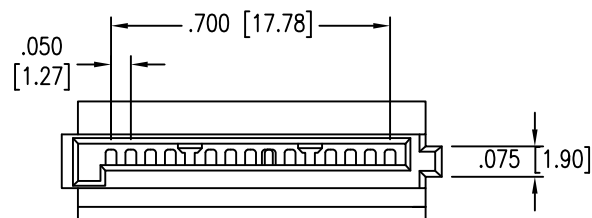

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Electrical:

Voltage rating: 15V DC

Current rating: 1.5 Amps

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minut

Temperature Rating:

Operating temperature: -35°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	7/21/11
CHECKED	NP	7/21/11
APPROVED		

METABEE
Metabee (Chengdu) Technology Co., Ltd.

Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE

SATA CRIMP HOUSING 15 PIN

SIZE
X

PART NO.

SATA-CH-B-15P

REV.
-

REF: S00123T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1