

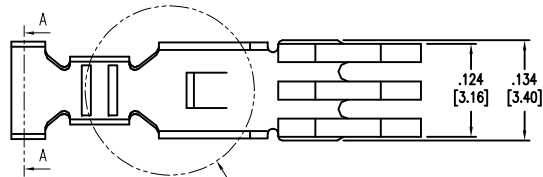


APPROVED: _____
 DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/18/11	




Detail D

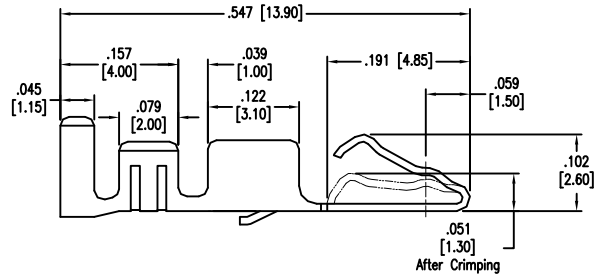


Detail D



SECTION A-A



SECTION B-B



SECTION C-C

SPECIFICATIONS:

Material:
 Contacts: Phosphor Bronze, Sel gold plated
 Electrical:
 Operation voltage: UL&CSA 30 V AC/DC
 Current rating: UL 8.3 Amps, CSA 3.0 Amps
 Mechanical:
 Recommended Wire Awg: 16-24 Awg
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			 Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com		
APPROVALS DRAWN AY CHECKED VW APPROVED			DATE 4/18/11 4/18/11		
SIZE X			PART NO. SATA-CTA-SG-R REV. -		
REF: S00173T			SCALE: NTS SHEET 1 OF 1		