

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/26/13	

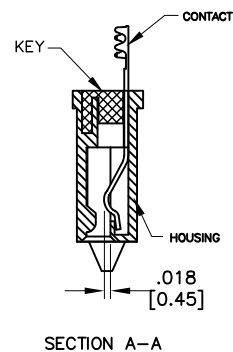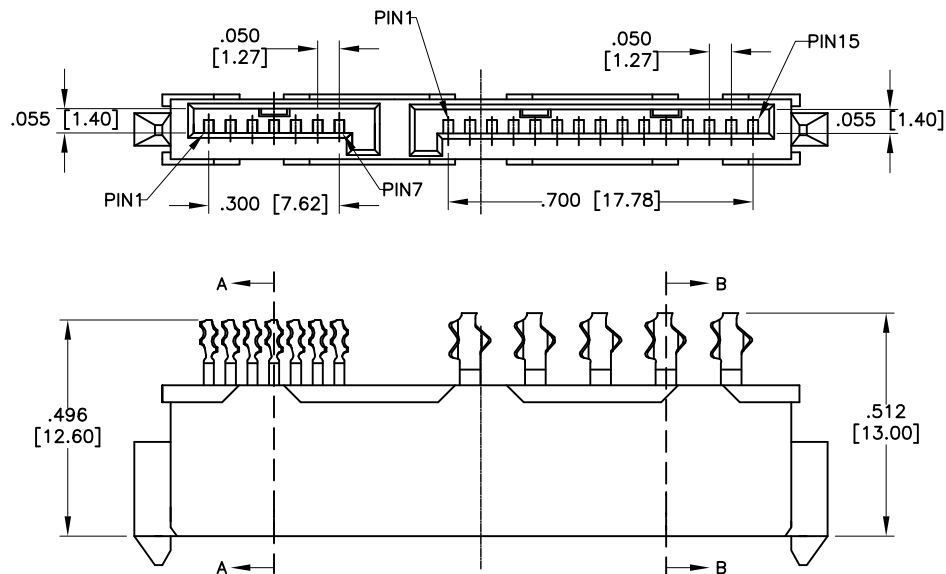

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contact: Phosphor Bronze, Gold plated

Electrical:

Current rating: 1.5 Amps max.

Contact resistance: 30 Milliohms max.

Insulation resistance: 1,000 Megohms min.

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	3/26/13
CHECKED	NP	3/26/13
APPROVED		



TITLE SATA CONNECTOR, 7P + 15, FEMALE TYPE G, GOLD PLATED, OVER MOLDING TYPE		
SIZE X	PART NO. SATA-G3-PM-F-OM	REV. -
REF: S00075C		SCALE: NTS
		SHEET 1 OF 1