


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/16/12	

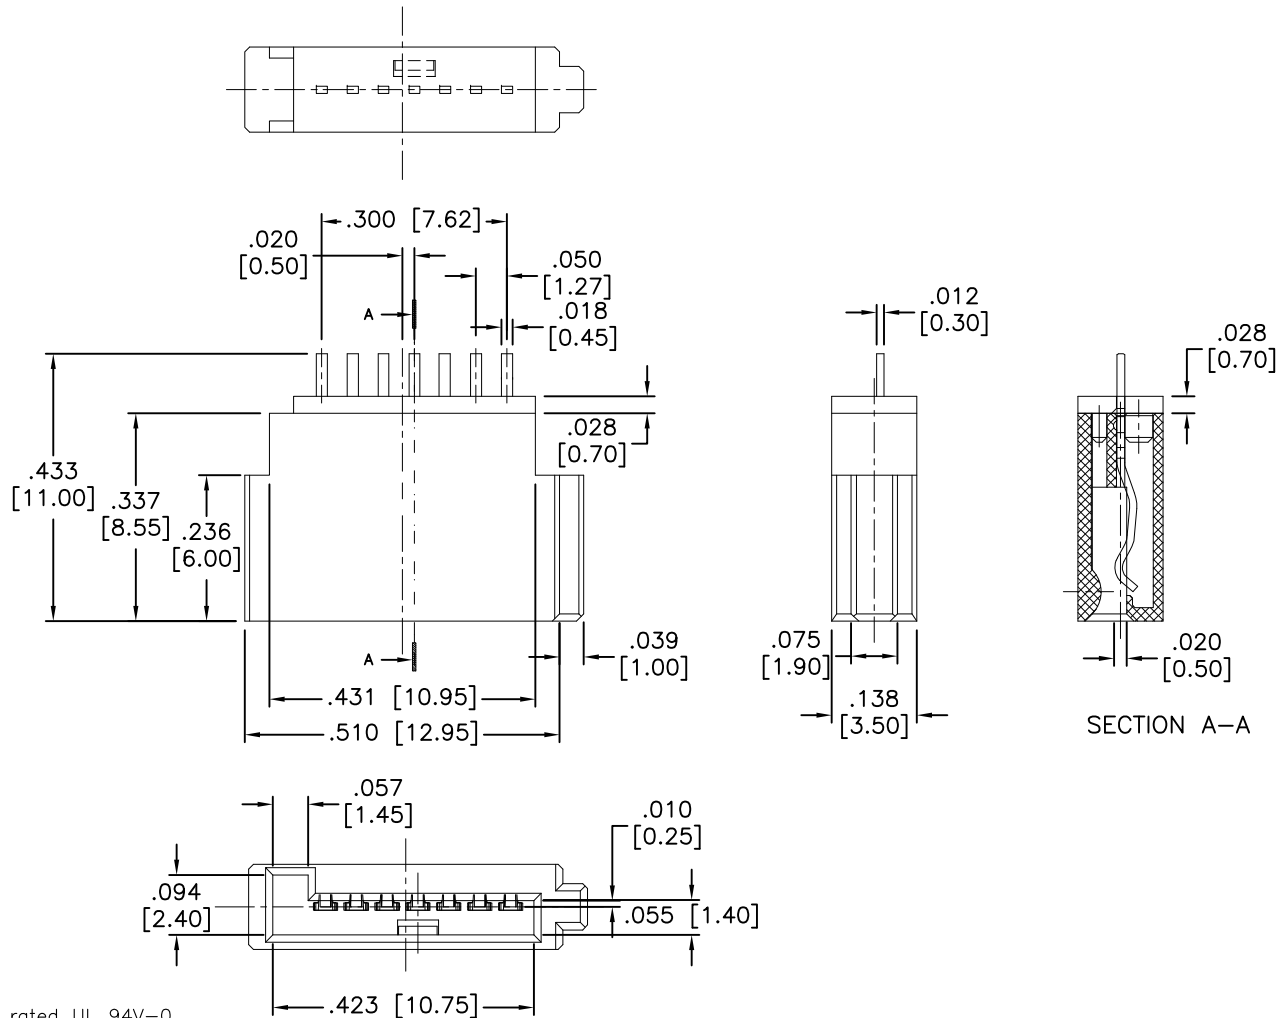

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Stopper: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

15u" Gold over Nickel underplate on contact area,

Tin over Copper underplate on solder tails

Electrical:

Operating voltage: 100 VAC max

Current rating: 1.5 Amps per contact

Contact resistance: 30 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

Operating temperature: -55°C to +125°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	AY	5/16/12
CHECKED	WC	5/16/12
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
SATA 7P, WITHOUT RELIEF PLATFORM VERTICLE THRU HOLE 15u" SEL GOLD PLATED			
SIZE	PART NO.	REV.	
X	SATA-Z-PL-VT-PC-15	-	
REF:	S00078T	SCALE:	NTS
SHEET 1 OF 1			