

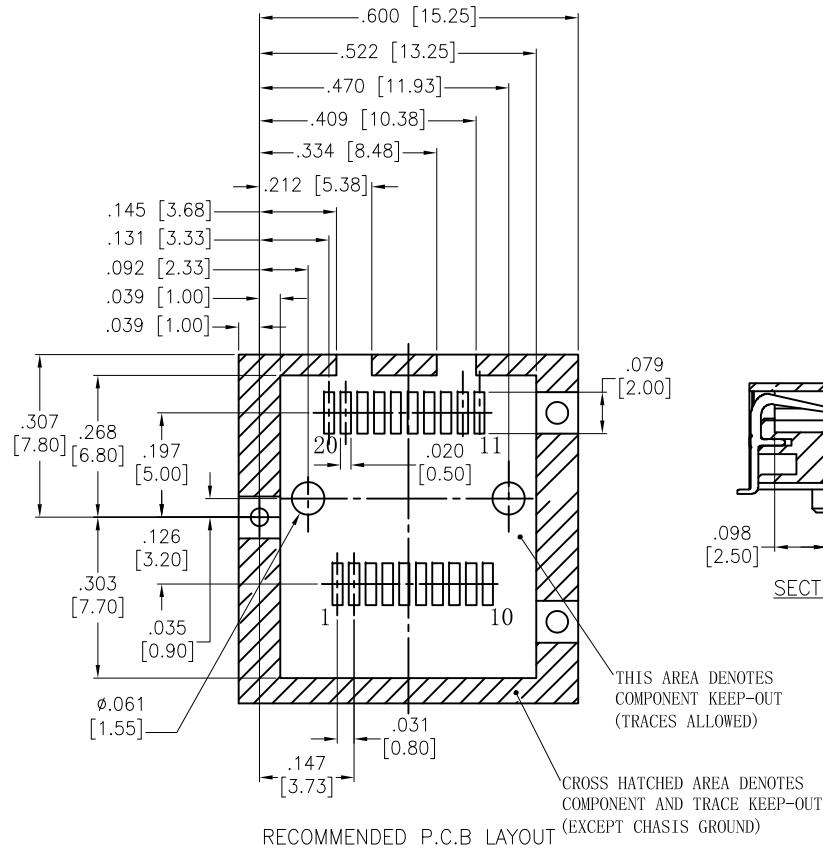


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/28/18	
A		ADDED DIM. & SPEC.	11/13/18	AY/IL



SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
15u" Gold over Nickel underplate on contact area,
Matte Tin over Nickel underplate on SMT tails
Electrical:
Voltage rating: 120 VAC
Current rating: 0.5 A
Contact resistance: 30 mohms max
Dielectric withstanding voltage: 300 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant

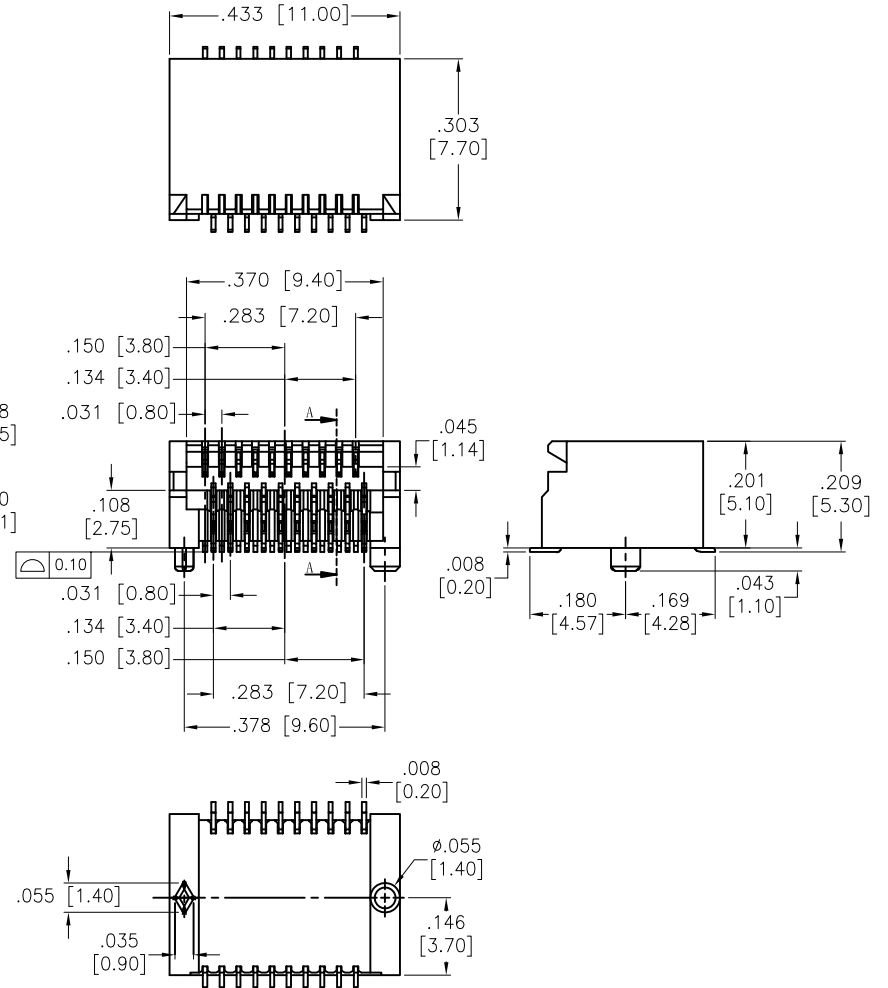

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES					
.X ± .10	Ø.X ± .10	.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010			TITLE SMALL FORM FACTOR CONNECTOR, 20P SMT TYPE, 15u" SEL-GOLD PLATED	
APPROVALS		DATE		SIZE X	PART NO. SFF-20-SGM-C-15-T/R
DRAWN	HR	5/28/18		REV. A	
CHECKED	LW	5/28/18		REF: S00005C	SCALE: NTS
APPROVED				SHEET 1 OF 1	