
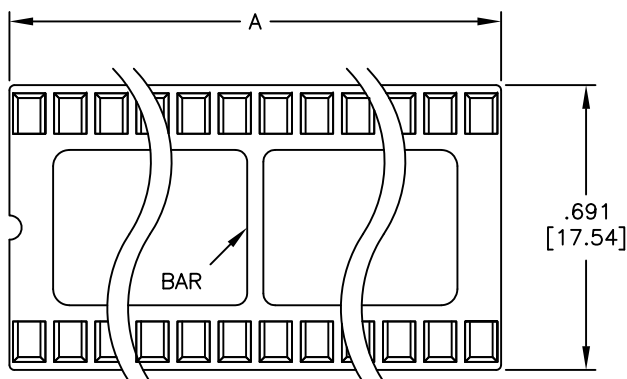
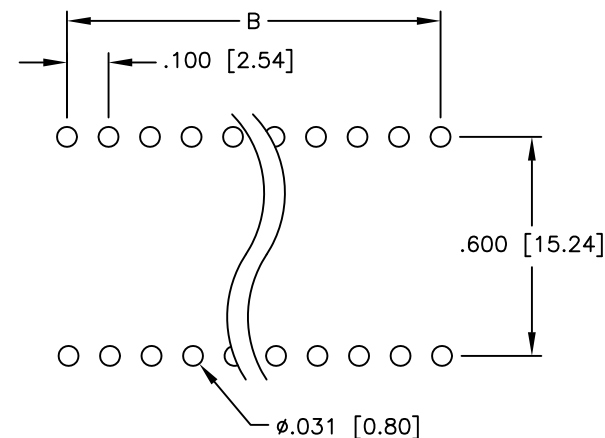
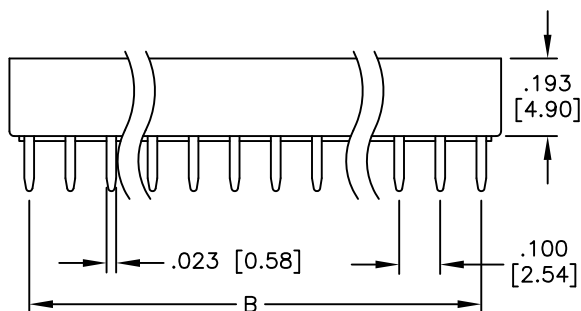


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/29/05	
A		UPDATED	12/10/07	
B		ADDED CENTER BAR	3/9/10	

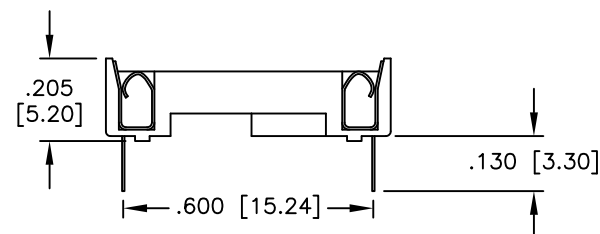

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max initial

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 20, 24, 26, 28, 32, 40, 42, & 48

A = .100 [2.54] x No. of Positions Per Row

B = .100 [2.54] x No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/29/05
CHECKED		
APPROVED		



TITLE
 IC SOCKET, .600" ROW SPACING
 TIN PLATED

SIZE X	PART NO. ICS-6XX-T	REV. B
REF:	SCALE: NTS	SHEET 1 OF 1