

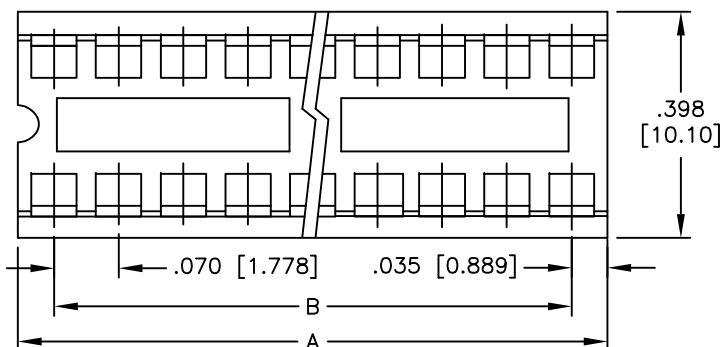


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/11	

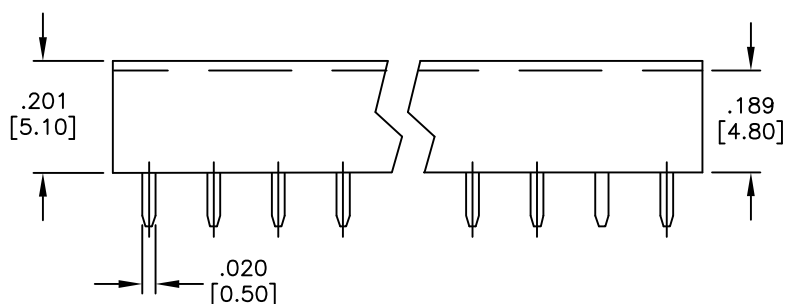

Positions	A	B
16	.560 [14.22]	.490 [12.45]
20	.700 [17.78]	.630 [16.00]
22	.770 [19.56]	.700 [17.78]
24	.840 [21.34]	.770 [19.56]

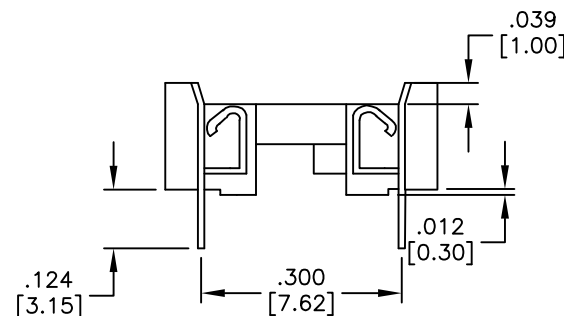

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze

Plating:
 Tin over Copper underplate overall

Electrical:
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Insertion Force: 45g max per contact
 Withdrawl Force: 14.5g min per contact

Temperature Rating:
 Operating temperature: -55°C to +105°C

Environmental:
 Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				
APPROVALS DRAWN AY 8/5/11 CHECKED AH 8/5/11 APPROVED			TITLE IC SHRINK DIP SOCKET, 16, 20, 22, 24PIN .300" ROW SPACING, TIN PLATED	
SIZE X			PART NO. ISD-3XX-T	REV. -
REF: S00196T			SCALE: NTS	SHEET 1 OF 1