






APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/15/15	
A		UPDATE DIM.	10/19/15	AY/GC

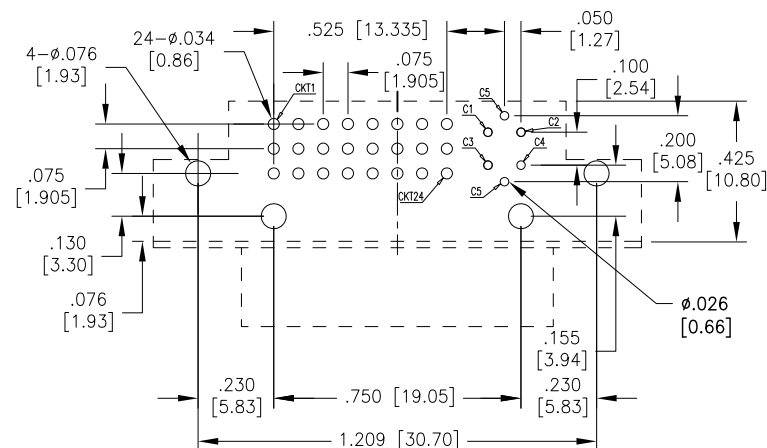

RECOMMENDED PCB LAYOUT

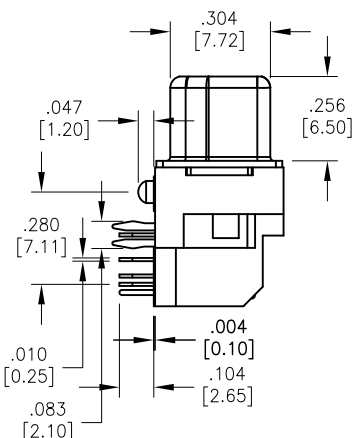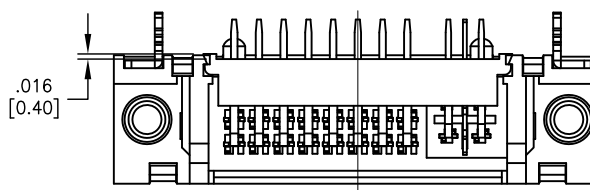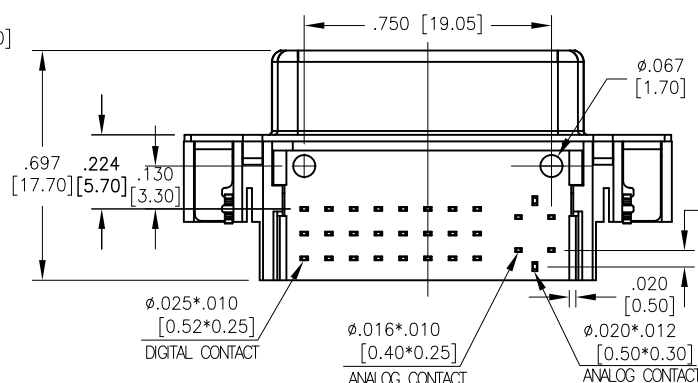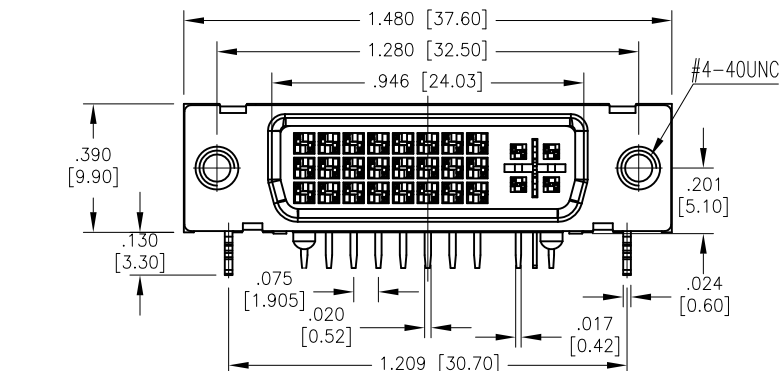

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Ivory

Latch: Hi-Temp Thermoplastic, rated UL 94V-0color: Ivory

Contacts: Copper Alloy

Shell: SPCC, Nickel plated

Boardlock: SPCC, Tin plated

Plating:

30u" Gold over Nickel underplate on mating area,

Tin over Nickel underplate on tails

Electrical:

Voltage: 40 VAC max

Current rating: 1.5 Ampere per Contact

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VDC (rms)

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		METABEE Metabee (Chengdu) Technology Co., Ltd. Tel: +8615926241606 E-mail: Sales@metabeeai.com	
.X ± .10	Ø.X ± .10	TITLE DIGITAL VIDEO INTERFACE SOCKET RIGHT ANGLE, PCB TAILS, ANALOG	
.XX ± .020	Ø.XX ± .015		
.XXX ± .015	Ø.XXX ± .010	SIZE X	
APPROVALS		DATE	
DRAWN	HR	7/15/15	
CHECKED	GC	7/15/15	
APPROVED			
PART NO. DVI-SL-24-2-30-HT-T/R		REV. A	
REF: S00027T		SCALE: NTS	
		SHEET 1 OF 2	

6

5

4

3

2

1

APPROVED: _____


DATE: _____ TITLE: _____

Rev AWO # Description Date Appr

SEE SHT 1 OF 2 FOR REVISION

100 pcs/reel

Packing Direction

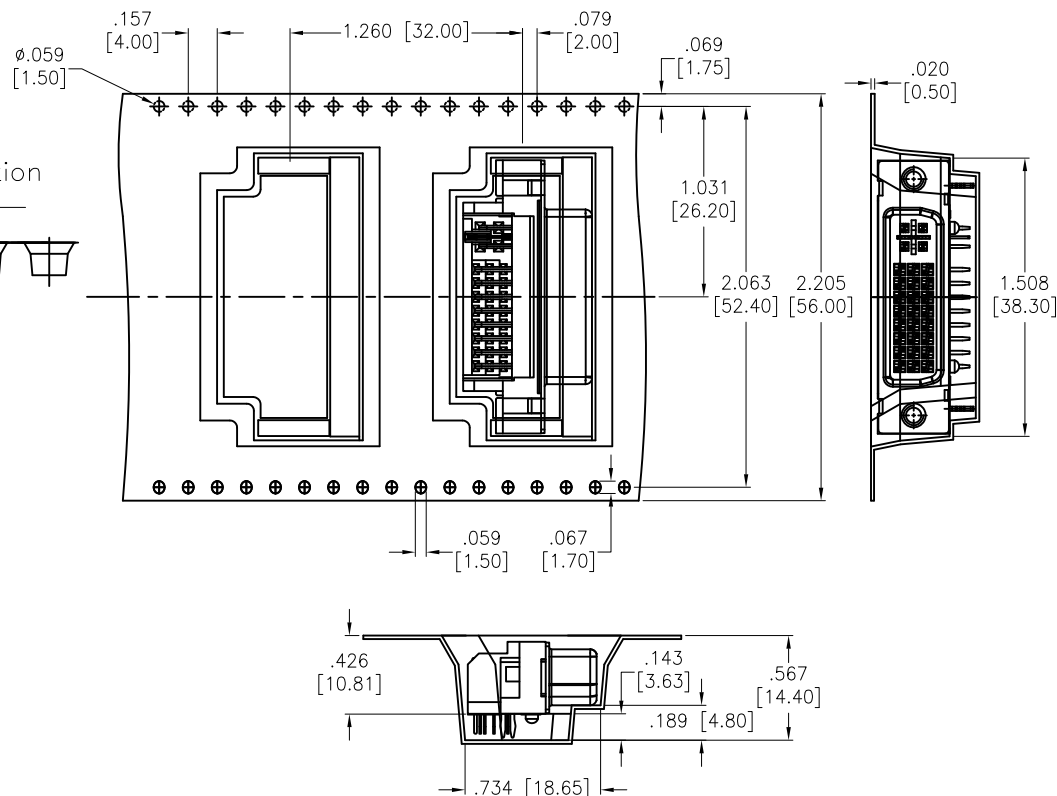O.D: $\phi 12.992$ [330.00]
I.D: $\phi 3.937$ [100.00]

Notes:

- 1.Packing Conforms EIA-481-B Standards.
- 2.10 sprocket hole pitch cumulative
- 3.Carrier camber is within 1mm in250mm.
- 4.Marterial: BLACK Polystyrene.
- 5.Packing length per 13" Reel: 4.2Meters.
- 6.Component load per 13" Reel: 100PCS.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTEDINCHES HOLES
.X $\pm .10$ $\phi .X$ $\pm .10$
.XX $\pm .020$ $\phi .XX$ $\pm .015$
.XXX $\pm .015$ $\phi .XXX$ $\pm .010$

APPROVALS

DATE

DRAWN

HR

7/15/15

CHECKED

GC

7/15/15

APPROVED

METABEEMetabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeal.comTITLE
DIGITAL VIDEO INTERFACE SOCKET
RIGHT ANGLE, PCB TAILS, ANALOG

SIZE

PART NO.

DVI-SL-24-2-30-HT-T/R

REV.

A

REF: S00027T

SCALE: NTS

SHEET 2 OF 2

6

5

4

3

2

1