
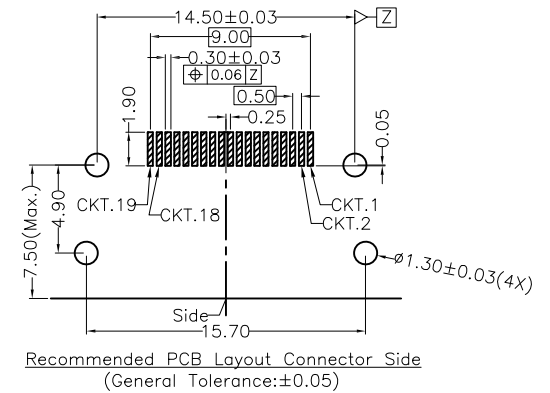
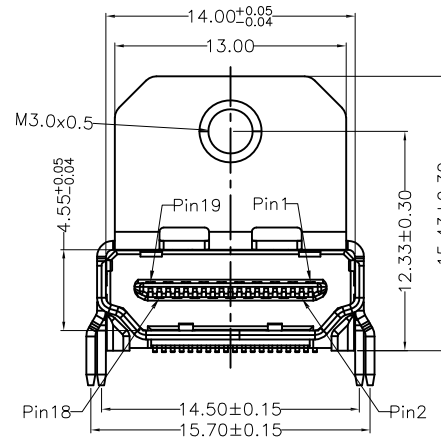
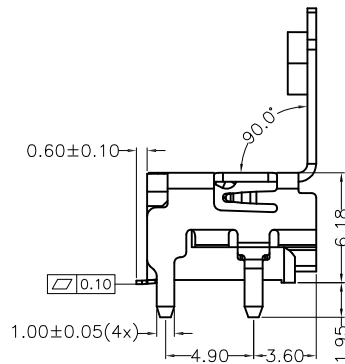


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/2/20	

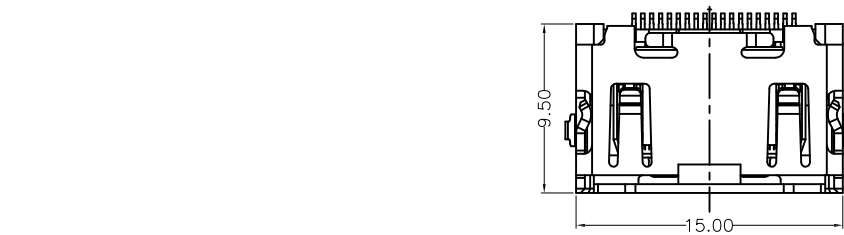

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Terminal: Brass, T=0.20MM

Shell: Brass, T=0.50MM, Nickel plated

Plating:

Gold flash over Nickel underplate on contact area

Matte Tin over Nickel underplate on solder tails

Electrical:

Current rating: 0.5A

Voltage rating: 40V

Contact resistance: 10 mohms max

Insulation resistance: Unmated: 100 Mohms min @ 500 VDC

Mated: 10 Mohms min @ 150 VDC

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X. ± 0.40 X' ± 2.5°
.X ± 0.30 .X' ± 2°
.XX ± 0.20
.XXX ± 0.10

APPROVALS		DATE
DRAWN	OW	1/2/20
CHECKED	BC	1/2/20
APPROVED		



Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

TITLE			
HDMI CONNECTOR, RIGHT ANGLE, SURFACE MOUNT, W / MOUNTING FLANGE			
SIZE	PART NO.	REV.	
X	HDMI-S-RA-SMT-01-MF	-	
REF:	S00005C	SCALE:	NTS
SHEET 1		OF 1	