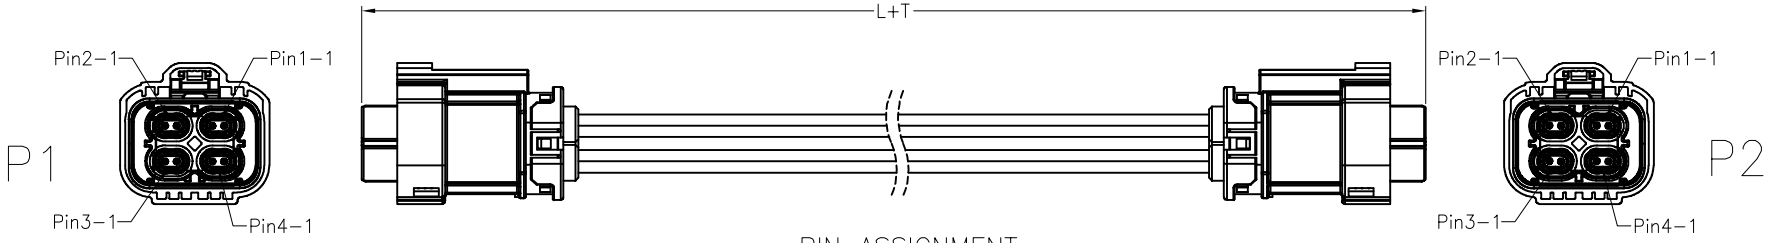
APPROVED: _____

DATE: _____ TITLE: _____

CUSTOM PRODUCT ARE NON-CANCELABLE / NON-RETURNABLE

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/20/25	
A		UPDATE SPEC.	9/1/25	WY/RC



PIN ASSIGNMENT

P1	P2
PIN 1-1	PIN 1-1
PIN 1-2	PIN 1-2
PIN 2-1	PIN 2-1
PIN 2-2	PIN 2-2
PIN 3-1	PIN 3-1
PIN 3-2	PIN 3-2
PIN 4-1	PIN 4-1
PIN 4-2	PIN 4-2

SPECIFICATIONS:

Connector:

P1&P2= High-speed Modular Twisted-pair Data Jack Connector 4Pin
Code see Page 2, 30u" Gold Plated

Cable:

Diffierential Cable, 26AWGx2C+AL+BRAID, O.D= .150" [3.8mm],
Jacket color: Black

Electrical:

Impedance: 100ohms
Insulation resistance: 100Mohms min @500V DC
Return loss:
Long SCC case8 for IL(3 GHz) > 15 dB:
≥(201≤f<48020-10log10(f485rft0)480≤f<3000123000≤f≤4000)db
1≤f≤4000, frequency fin MHz

Mechanical:

Insertion Force: 45N max
Unmating Force: 5N min
Durability: 25 cycles min
Retention force latch: 110N min

Environmental:

Thermal shock & Mechanical shock & Humidity & Vibration:
USCAR-2 & USCAR-17
DIN EN 60512 & DIN IEC 60068

Temperature Rating:

Operating temperature: -40°C to +105°C

Electrical Test:

All Assemblies must be 100% Tested for
Shorts, Open, Continuity, and Physical Appearance.

Packing:

Standard: Bag

Environmental:

Waterproof: IP67(Mated)
Lead free, RoHS compliant RoHS COMPLIANT

CA-HTJ4X-HTJ4X-WP-XM

ADAM TECH P/N	L+T
CA-HTJ4X-HTJ4X-WP-1M	39.370"±1.181" [1000±30mm]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES .X ± .10, .XX ± .020, .XXX ± .015
HOLES Ø.X ±.10, Ø.XX ±.015, Ø.XXX ±.010

DRAWN	WY	8/20/25
CHECKED	RC	8/20/25
APPROVED		

METABEE

Metabee (Chengdu) Technology Co., Ltd.
Tel: +8615926241606 E-mail: Sales@metabeeai.com

METABEE

TITLE
CUSTOM ASSEMBLY, 26AWG, W/CPA, HIGH-SPEED MODULAR TWISTED-PAIR DATA JACK CONNECTOR 2X2, IP67

SIZE	PART NO.	REV.
X	CA-HTJ4X-HTJ4X-WP-XM	A

REF:	SCALE:	SHEET
S00013T	NTS	1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

















APPROVED: _____

DATE: _____ TITLE: _____

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

★Developing

CA-HTJ4X-HTJ4X-WP-XM

A	B	C	D	E	F	G★	H★
JET BLACK	PURE WHITE	LIGHT BLUE	CLARET VIOLET	MAY GREEN	NUT BROWN	PLATINUM GREY	LIGHT PINK
							
J★	K★	L★	M★	N★	P★	R★	Z
BEIGE	CURRY	YELLOW GREEN	PASTEL ORANGE	PASTEL GREEN	CARMINE RED	SIGNAL BLUE	WATER BLUE
							

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	.X	± .10	HOLES	Ø.X	±.10
	.XX	± .020		Ø.XX	±.015
	.XXX	± .015		Ø.XXX	±.010

DRAWN	WY	8/20/25
CHECKED	RC	8/20/25
APPROVED		

METABEE

Metabee (Chengdu) Technology Co., Ltd.

Tel: +8615926241606 E-mail: Sales@metabeeai.com

METABEE

TITLE

CUSTOM ASSEMBLY, 26AWG, W/CPA, HIGH-SPEED MODULAR TWISTED-PAIR DATA JACK CONNECTOR 2X2, IP67

SIZE	PART NO.	REV.
X	CA-HTJ4X-HTJ4X-WP-XM	A

REF:	SO0013T	SCALE: NTS	SHEET 2 OF 2